


- GENERAL NOTES:
1. RUNOFF COEFFICIENT PRE- CONSTRUCTION 0.50
 2. RUNOFF COEFFICIENT POST CONSTRUCTION 0.83
 3. EXISTING SOIL ON SITE IS GENERALLY A SILTY CLAY.
 4. APPROXIMATE AVERAGE SLOPES OF SITE 0.70%.
 5. TOTAL DISTURBED AREA IS 1.65 ACRES.
 6. ACCUMULATIONS OF SEDIMENT ESCAPING THE SITE MUST BE REMOVED.
 7. SEDIMENT MUST BE REMOVED FROM SEDIMENT TRAPS WHEN DESIGN CAPACITY IS REDUCED BY 50%.
 8. CONSTRUCTION DEBRIS AND CHEMICALS SHALL BE PREVENTED FROM POLLUTING ANY STORM WATER DISCHARGE.
 9. SOD AND/OR GRASS SEED SHALL BE PLACED ON SITE AS SOON AS PRACTICAL TO STABILIZE THE SITE.
 10. HAY BALES ALONG DISCHARGE PATH ARE USED TO DISSIPATE FLOW CONDITIONS AND COLLECT SEDIMENT.
 11. CONTRACTOR TO REMOVE ANY SILT ACCUMULATIONS ALONG DRAINAGE OUTFALL PATH AFTER RAINFALL (S).

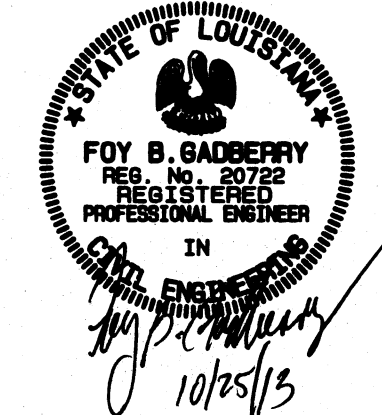

STORMWATER POLLUTION PREVENTION PLAN

DATE
9-12-13

C008

JOB No 130412

SOUTHERN HOSPITALITY SERVICES

MONROE, LA.

DAVID LANE BEAIRD & ASSOCIATES, INC

HAMPTON INN & SUITES

CIVIL & STRUCTURAL ENGINEERS PLANNING PROJECT MANAGEMENT
105 COMMERCIAL PARKWAY, WEST MONROE, LOUISIANA 71291 (318) 385-3227
email: beaird@dlbengineering.com