



 SEE NOTES ON SHEET C1.1 FOR MORE INFORMATION.
 CONTRACTOR TO CONTACT MISSISSIPPI ONE CALL @ 601-362-4374 AT LEAST 48 HOURS BEFORE IMPROVEMENTS ARE MADE.
 CONTRACTOR SHALL BE REQUIRED TO FURNISH ALL MATERIALS AND PERFORM ALL WORK FOR THE PROPER INSTALLATION, MAINTENANCE, AND REMOVAL OF TEMPORARY EROSION CONTROL MEASURES TO CONTROL SILTATION.
 SILT FENCE SHOWN ON THE EROSION CONTROL PLAN IS DIAGRAMMATIC AND WILL NEED TO BE INSTALLED AT LOCATIONS NECESSARY TO KEEP SILT LADEN RUN-OFF FROM LEAVING SITE DURING ALL PHASES OF CONSTRUCTION.
 ADDITIONAL HAY BALES, SILT FENCE, OR OTHER EROSION CONTROL MEASURES MAY BE NECESSARY SHOULD EXISTING CONTROLS PROVE TO BE INEFFECTIVE IN PREVENTING SEDIMENT FROM LEAVING THE SITE.
 CONTRACTOR TO MAINTAIN ALL EROSION CONTROLS. AS A MINIMUM, ALL ACCUMULATED SEDIMENT SHALL BE REMOVED FROM CONTROLS WHEN IT REACHES 1/3 TO 1/2 THE HEIGHT OF THE CONTROL AND PROPERLY DISPOSED. NON-FUNCTIONING CONTROLS SHALL BE REPAIRED, REPLACED OR SUPPLEMENTED WITH FUNCTIONAL CONTROLS WITHIN 24 HOURS OF DISCOVERY OR AS SOON AS FIELD CONDITIONS ALLOW. 1. SEE NOTES ON SHEET C1.1 FOR MORE INFORMATION.

7. AN INSPECTION SHALL BE PERFORMED WEEKLY, WITHIN 24 HOURS AFTER COMMENCEMENT OF A RAINFALL OR AS OFTEN AS IS NECESSARY TO ENSURE THAT APPROPRIATE EROSION AND SEDIMENT CONTROLS HAVE BEEN PROPERLY INSTALLED AND MAINTAINED AND TO DETERMINE IF ADDITIONAL CONTROLS ARE NECESSARY. ALL INSPECTIONS OR REPORTS ARE THE CONTRACTOR'S RESPONSIBILITY.

8. CONSTRUCTION ROAD LOCATION TO BE DETERMINED BY THE CONTRACTOR.

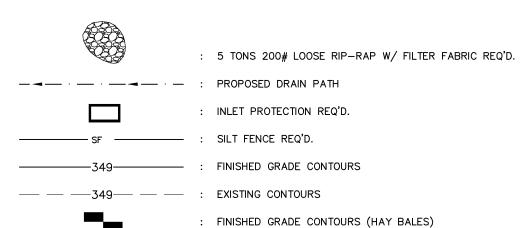

PROPOSED CONSTRUCTION ROAD

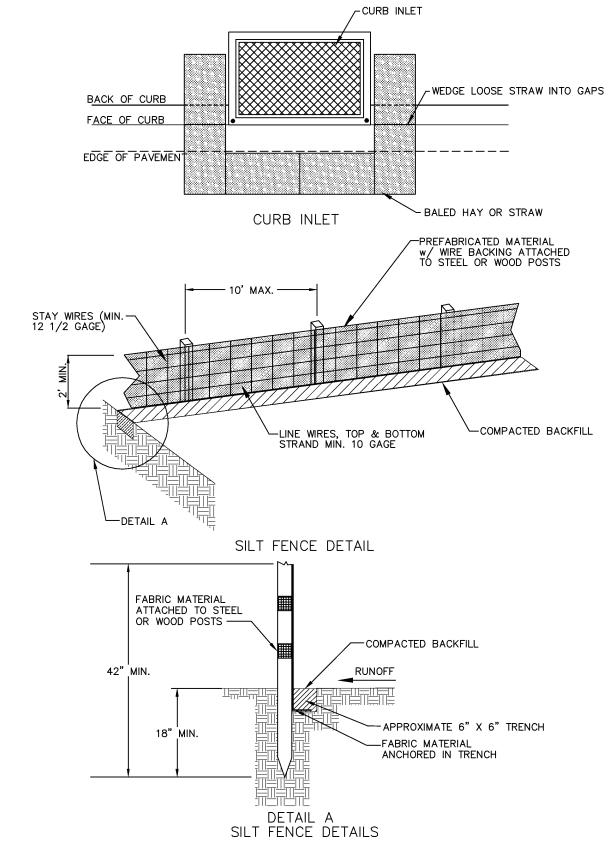

NORTH

GRAPHIC SCALE

(IN FEET)

1 inch = 30 ft.



CONTROL PLAN

ENGINEER

SHEET NUMBER PROJECT NUMBER

B-1347