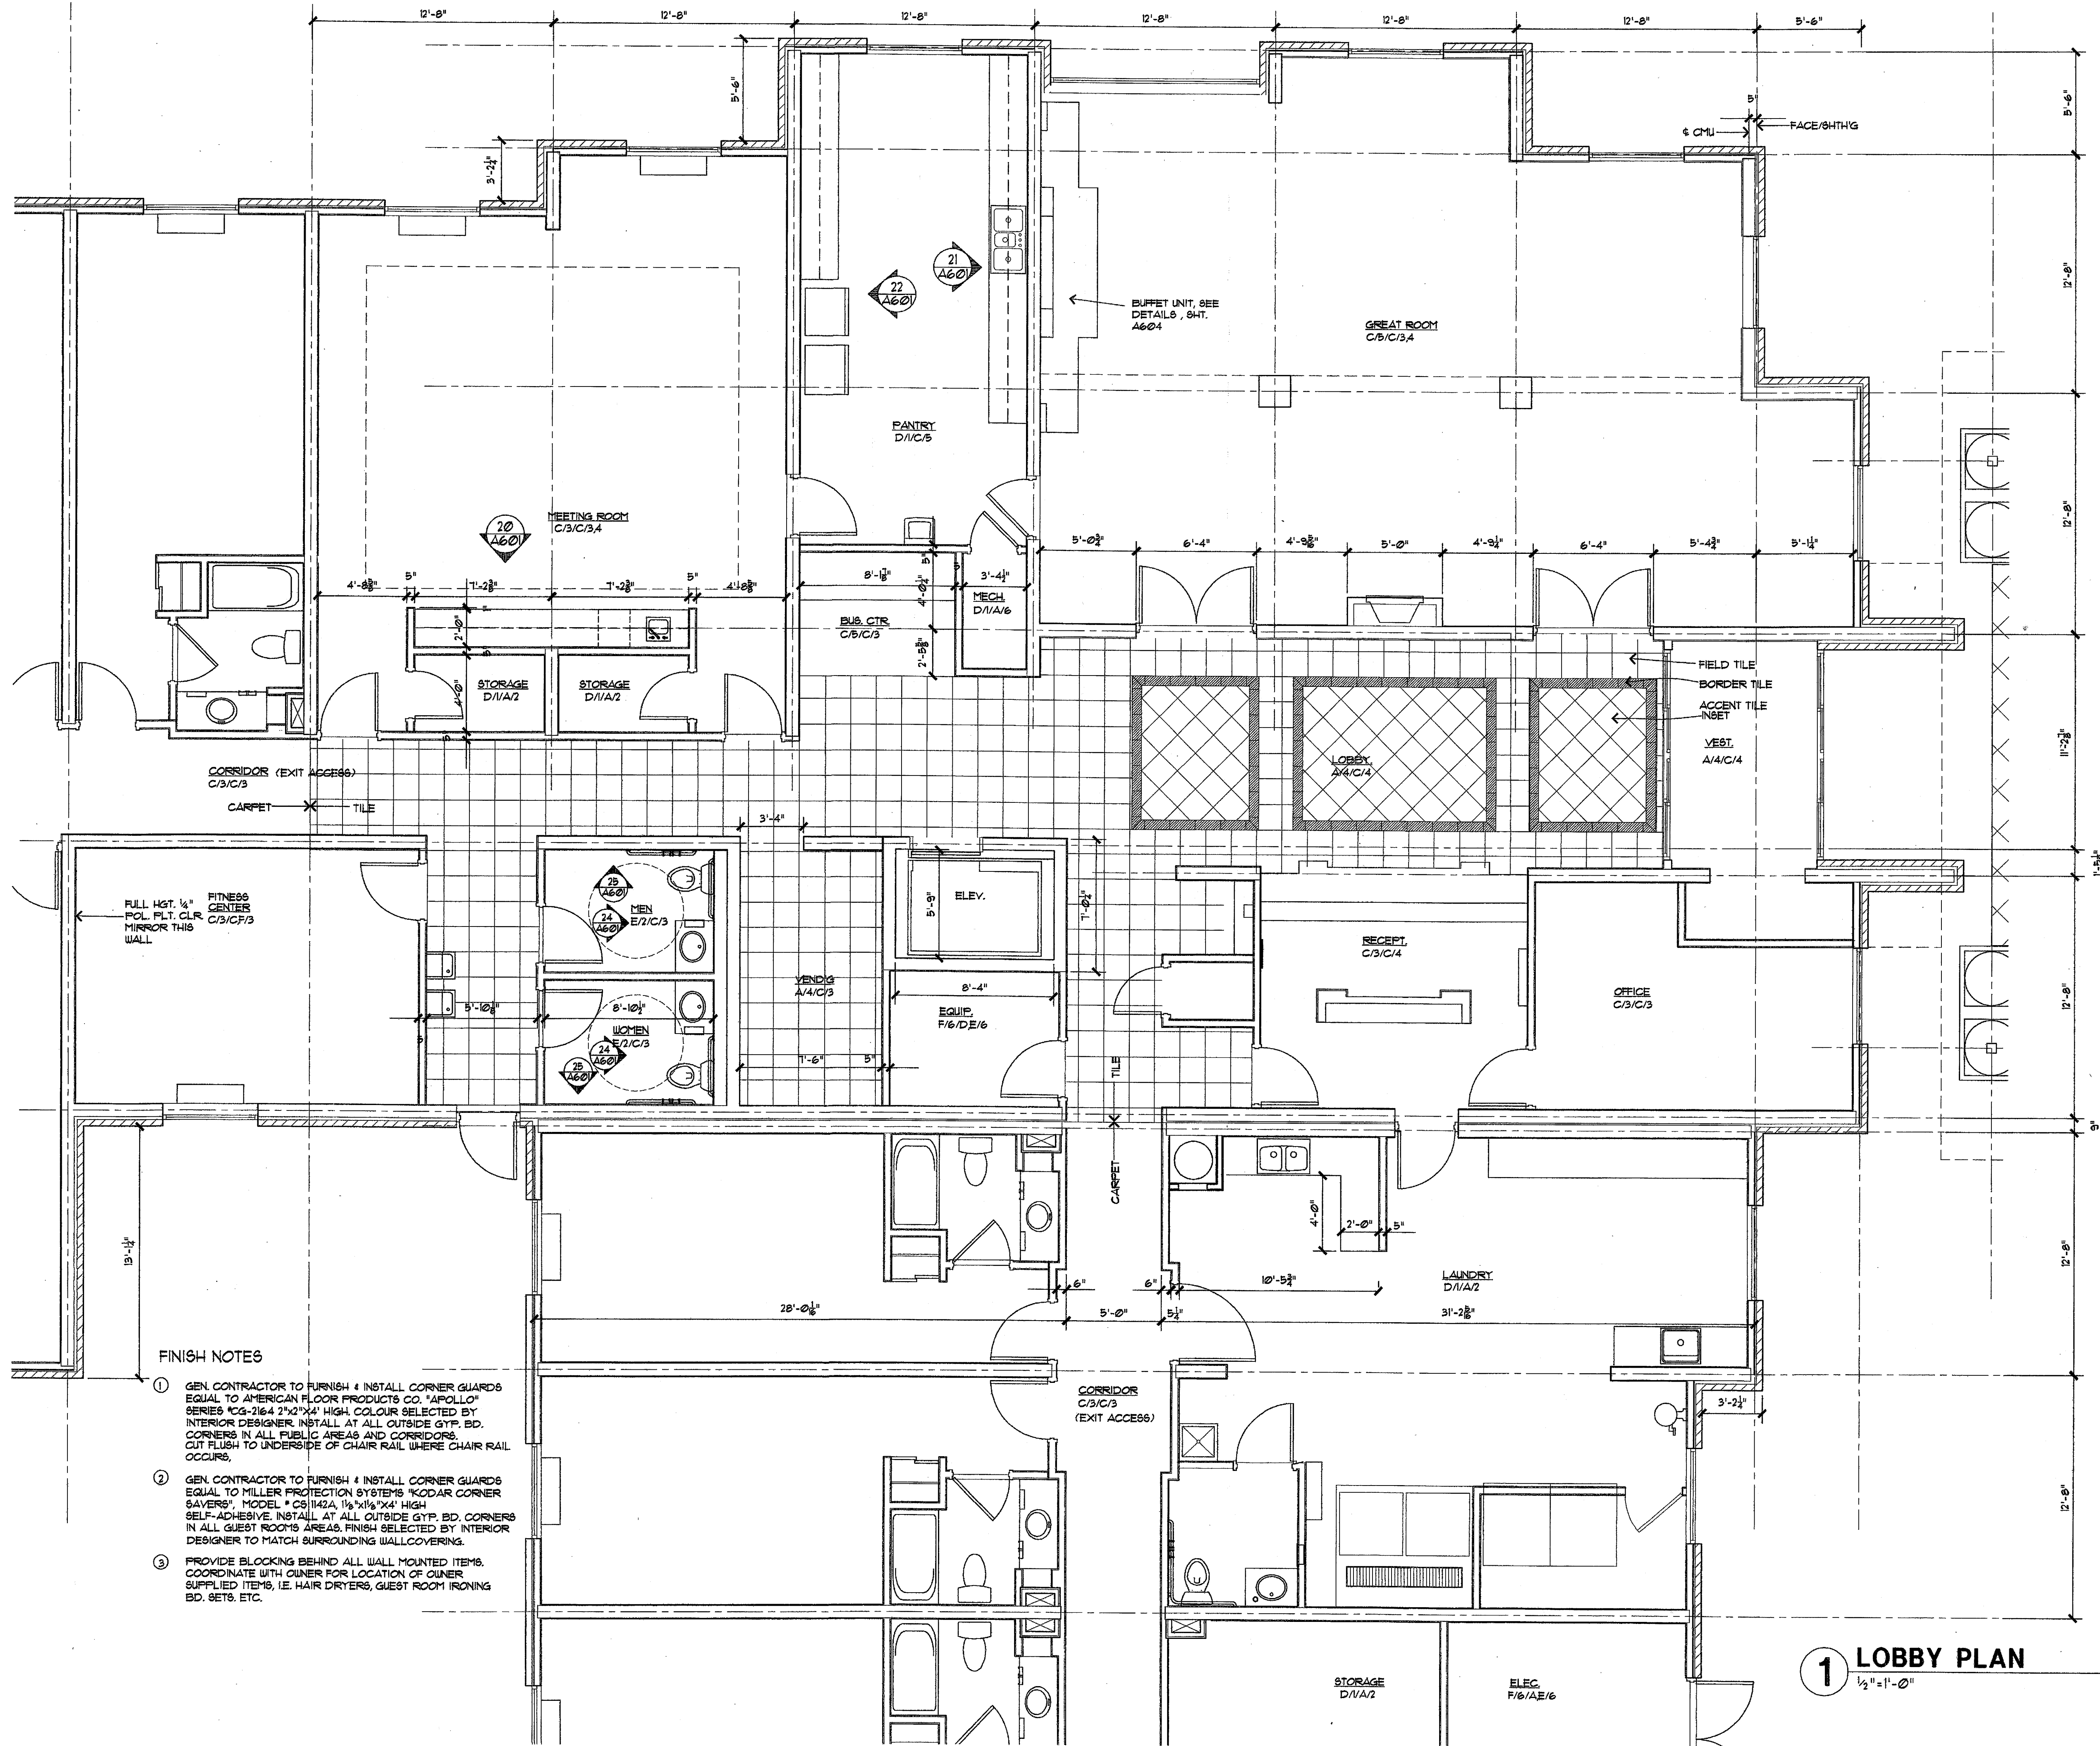


Richard Molenaar
ARCHITECT

FINISH SCHEDULE

100 Room Number

Room Name Room Name

1/1/1/1
Ceiling Finish
Wall Finish
Base Finish
Floor Finish

Floors

- Thin Set Marble Tile, 12" x 12"
Contr. Furn. Contractor Installed (CFCI)
- Thin Set Porcelain Tile
Contr. Furn. Contractor Installed (CFCI)
- Carpet and Pad (CFCI)
- Vinyl Composition Tile
- Ceramic Tile
- Concrete, Sealed
- Painted Concrete

Base

- 4" Vinyl
- Ceramic Tile
- 4" Carpet w/Top Binding Edge
- Match Flooring
- Wood Base Base Det., Sheet A601
- None Required

Walls

- Painted Gyp. Bd. (Eggshell Oil Base Enamel)
- 4" Ceramic Tile
- Wallcovering (CFCI)
- Painted Gyp. Bd. (Semi-gloss Oil Base Enamel)
- Painted Concrete Masonry Units
- 1/4" Polished Clear Mirror (full wall height) over Gyp. Bd.

Ceilings

- Spray Aristex on Gyp. Bd.
- Spray Aristex on Concrete Structural Deck
- New Ceiling Panel System identical to Armstrong 4571 Chamfered Cirrus Pattern, 24"x24"x3/8" Tegular Lay-in for Suprafine 9/16" Exposed Tee Grid. Panel 4 Grid Colour Selected By Interior Designer From Standard Colour Selections.
- Painted Gyp. Bd. (Smooth Finish) Colour Selected By Interior Designer. Oil Base Enamel
- New Ceiling Panel System identical to Armstrong 4525 Ceramaguard Nonperforated Square Lay-in, Med. Texture 24"x24"x3/8" for Prelude 15/16" Exposed Tee Grid. Panel 4 Grid Colour Selected By Owner From Standard Colour Selections.
- Unfinished Structural Deck

PROJECT NAME:

Holiday Inn Express
HOTEL & SUITES
Underwood Road
Vicksburg, MS 38671

SHEET TITLE:

PROJECT NO.
01005

LATEST REVISION:

DRAWN BY:

CHECKED BY:

SHEET NUMBER:

DATE:

A303