



Richard Molenaar
ARCHITECT

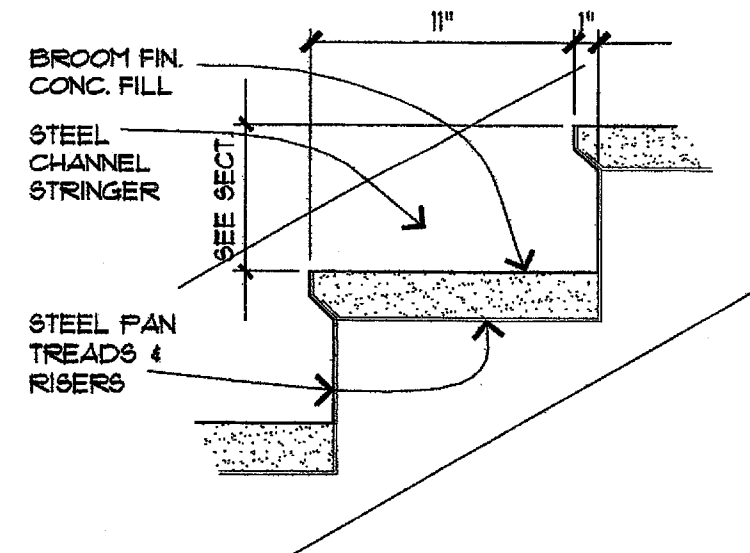


5 STAIR TREAD DET.
1/2" = 1'-0"


- STAIR NOTES
- PROVIDE COMPLETE HANDRAIL/GUARDRAIL SYSTEM IN STAIR # 1 & 2, IN CONFORMANCE WITH 1991 STANDARD BUILDING CODE.
- STAIR HANDRAIL - 1 1/2" DIA. ROUND PAINTED STEEL TUBE, HANDRAIL MOUNTED TO WALL AND TO GUARDRAIL POSTS.
 - GUARDRAIL:
 - TOP RAIL, POSTS AND BOTTOM RAILS - 1 1/2" SQUARE PAINTED STEEL TUBE, ANCHOR POSTS SECURELY TO STEEL CHANNEL STRINGER AND LANDING CONSTRUCTION.
 - PICKET RAILS - 3/4" SQUARE PAINTED STEEL TUBES @ 4 1/2" O.C.

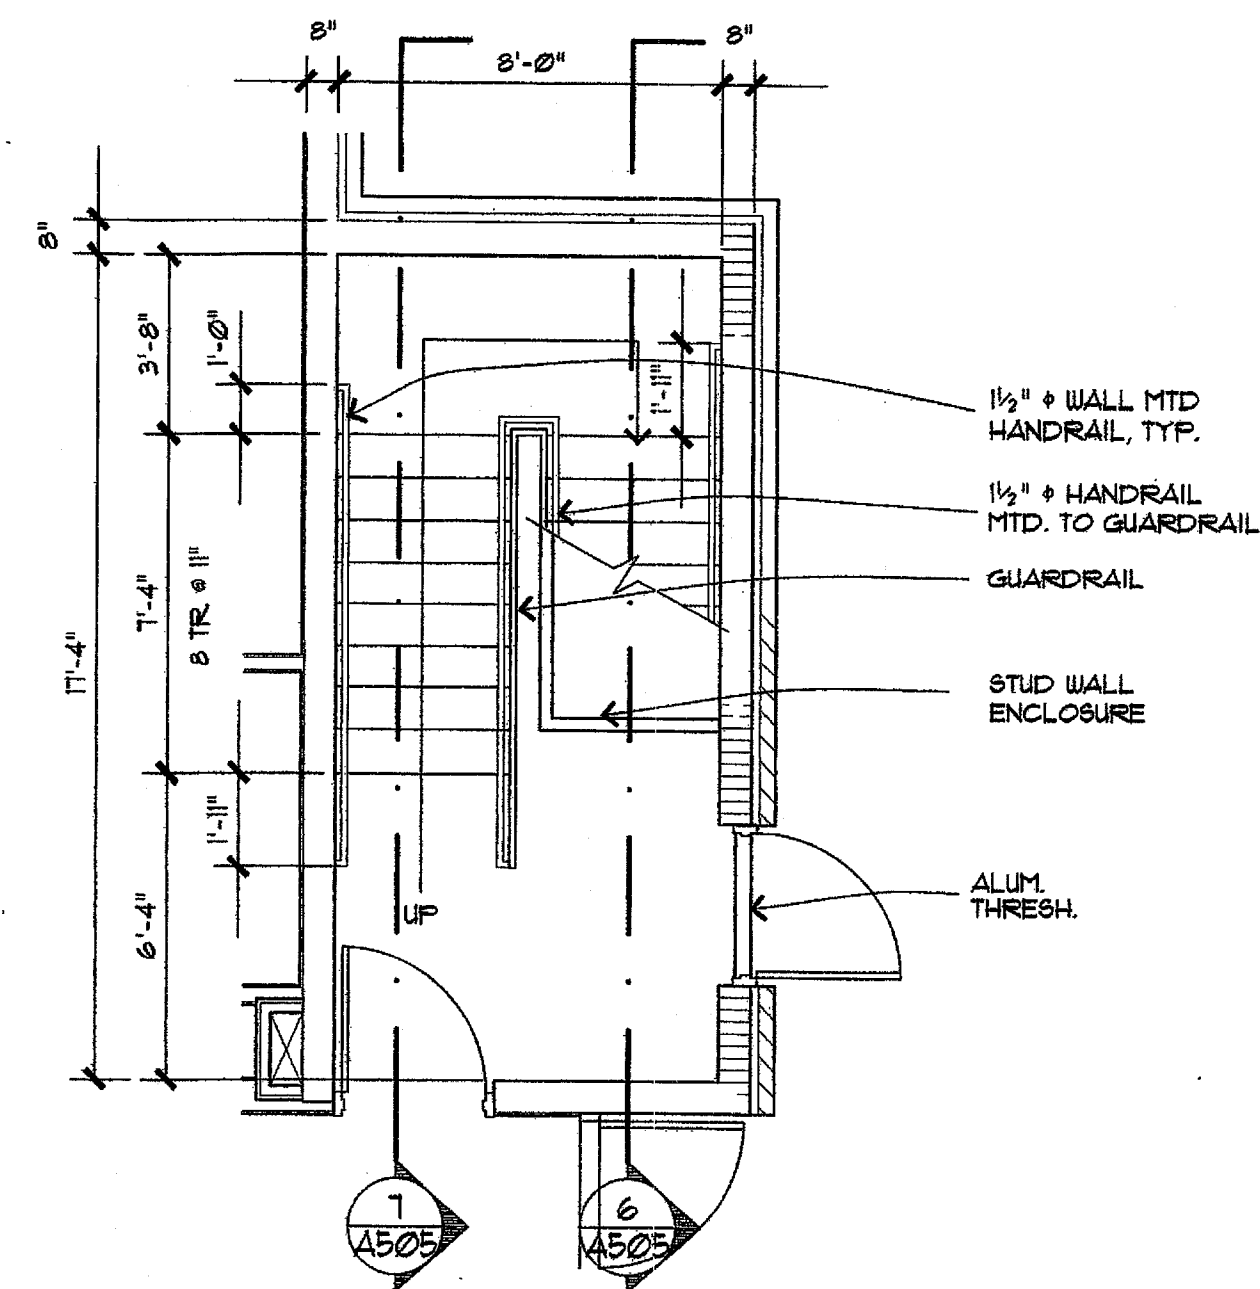


1 STAIR No. 1, GROUND FLOOR
1/4" = 1'-0"

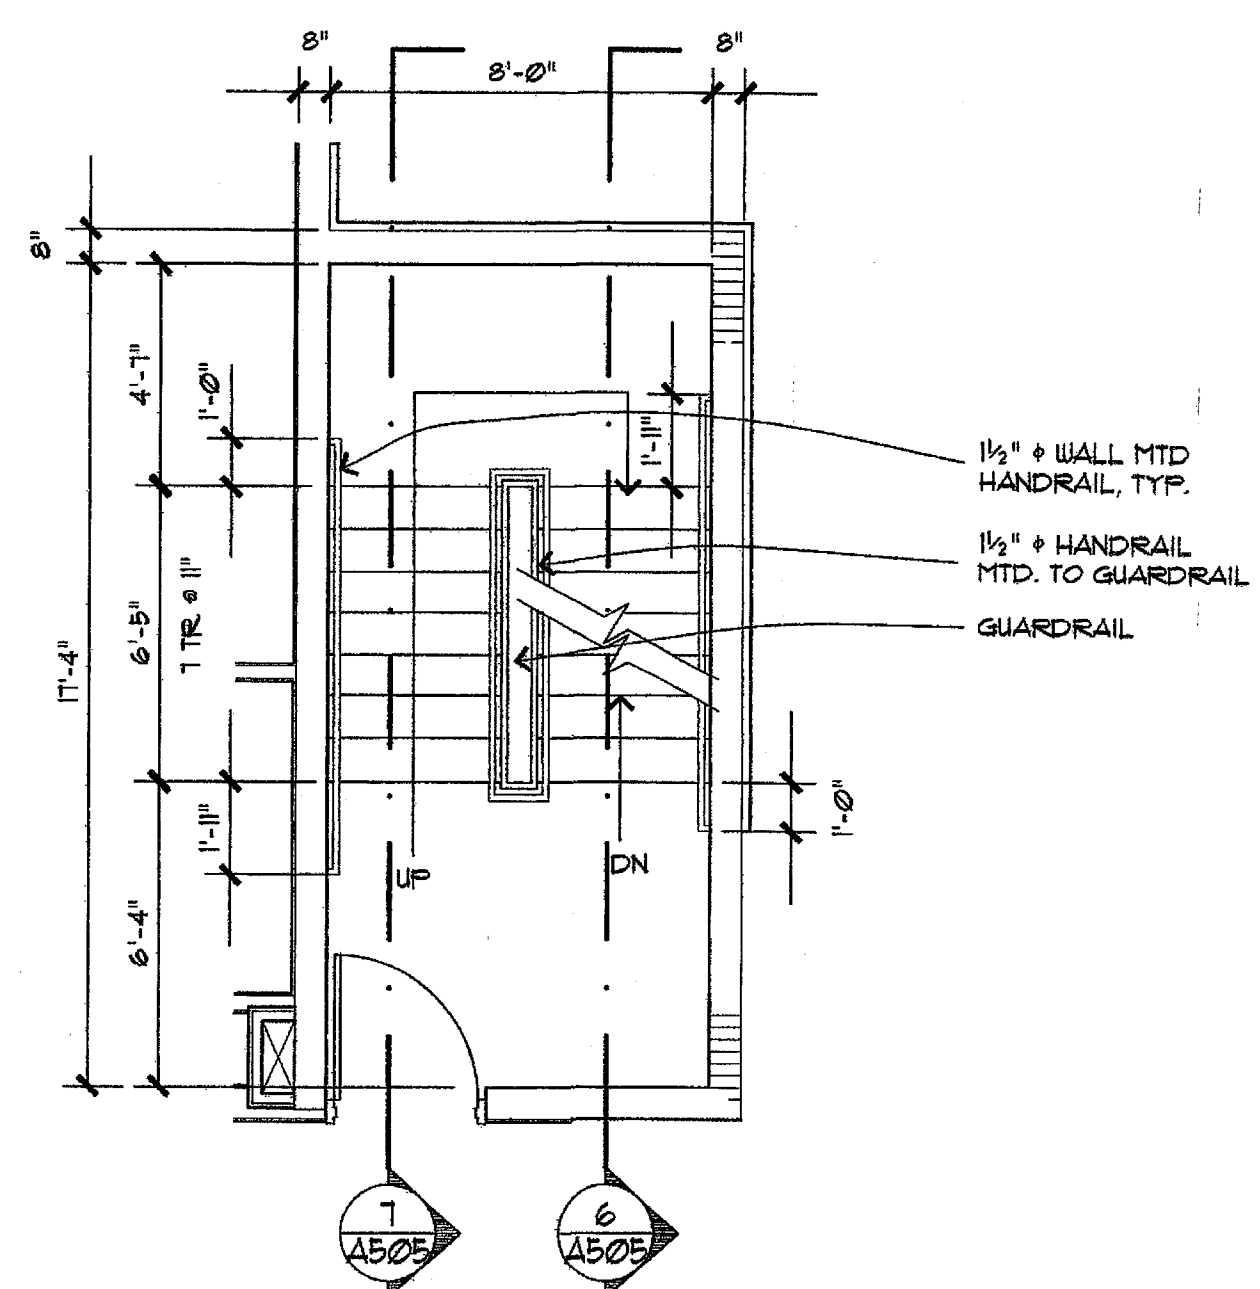


2 STAIR No. 1, 2nd FLOOR
1/4" = 1'-0"

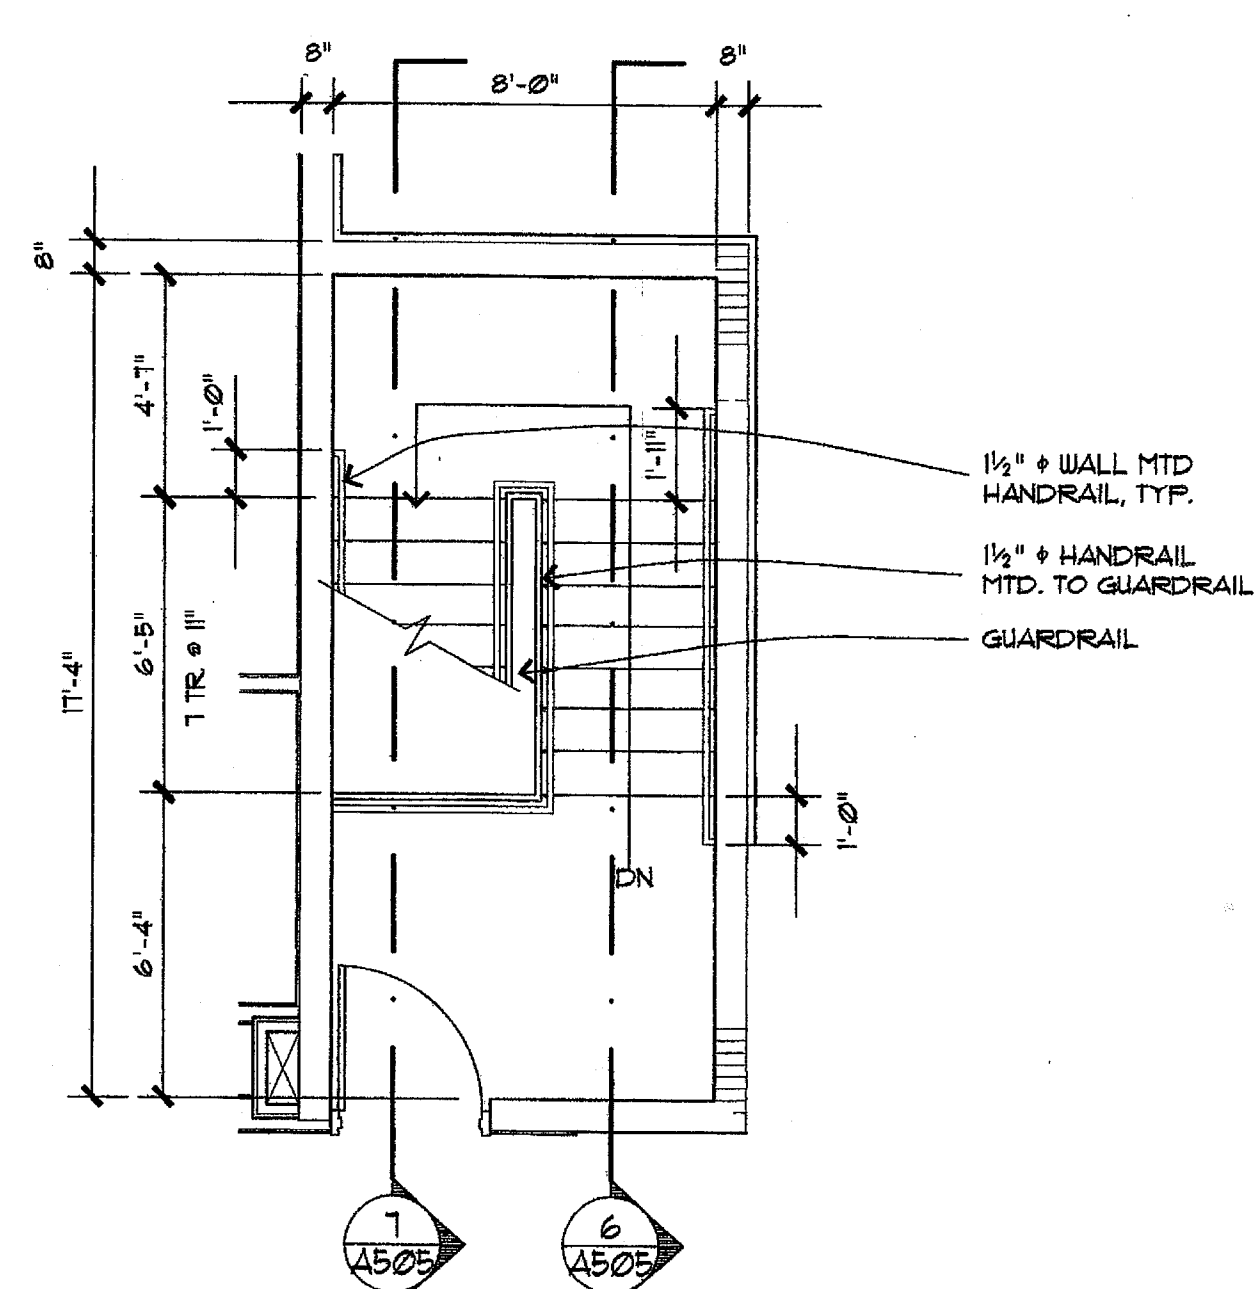

3 STAIR No. 1, 3rd FLR
1/4" = 1'-0"

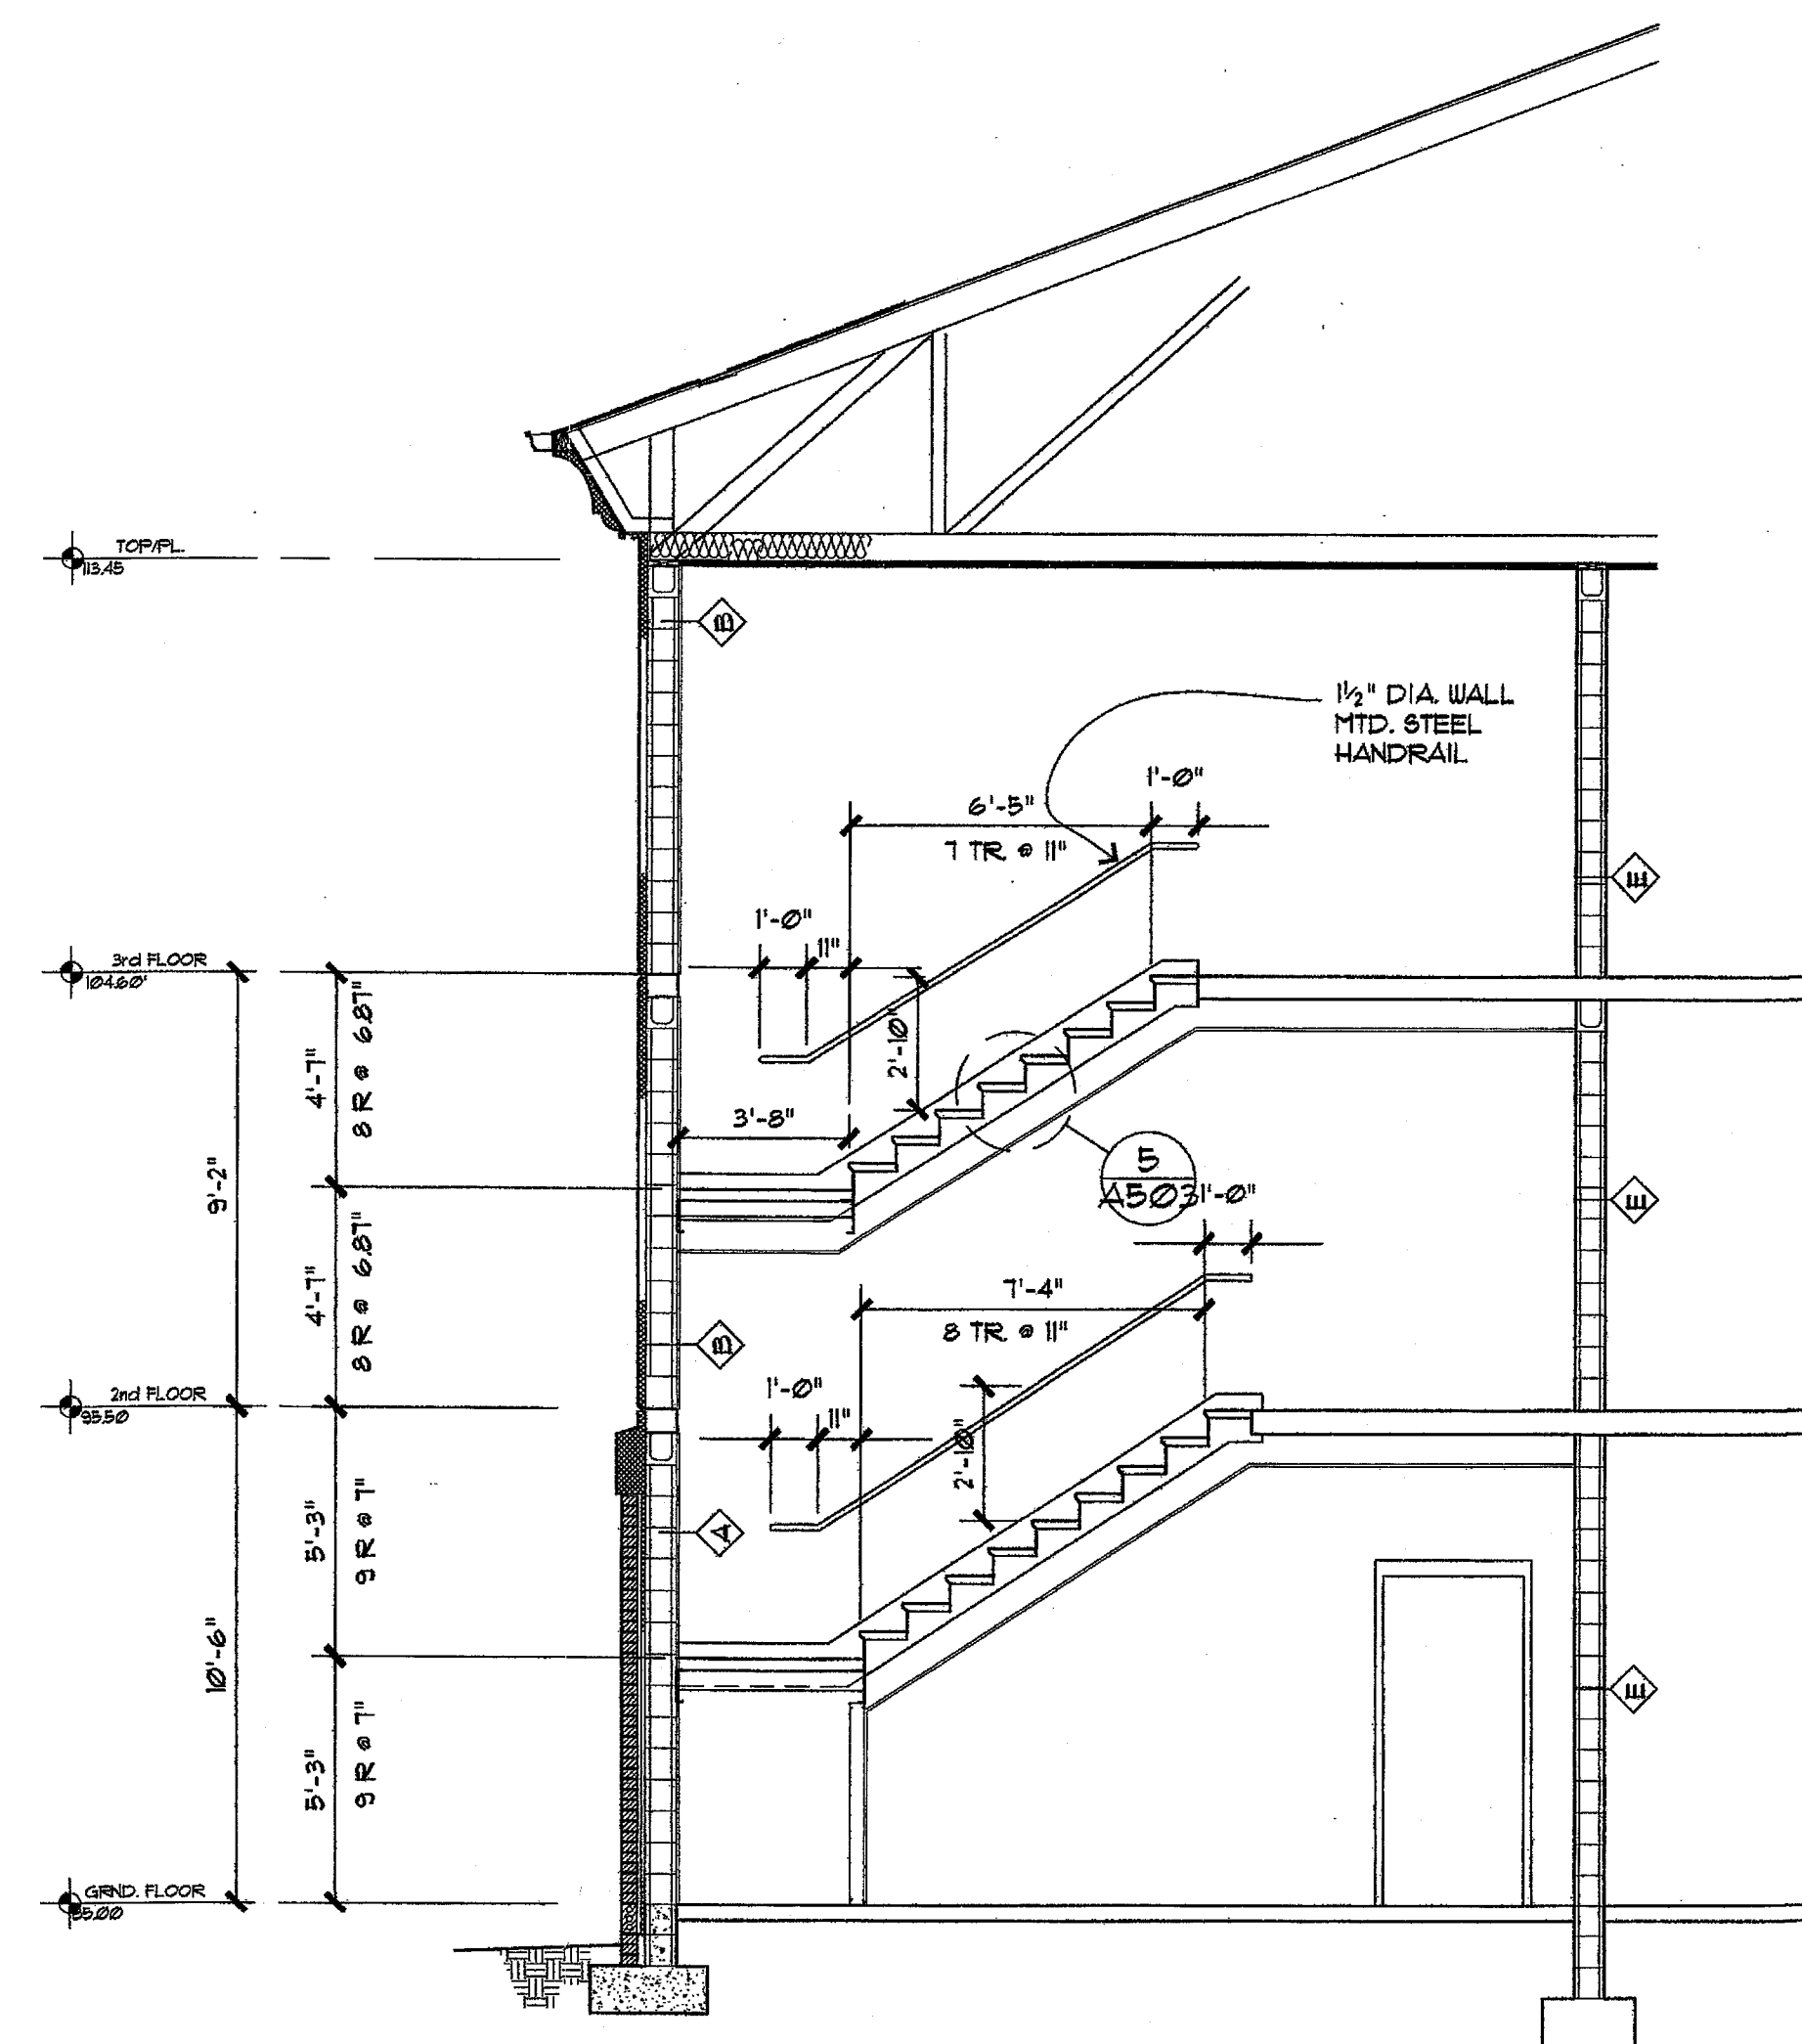

6 STAIR SECTION
1/4" = 1'-0"

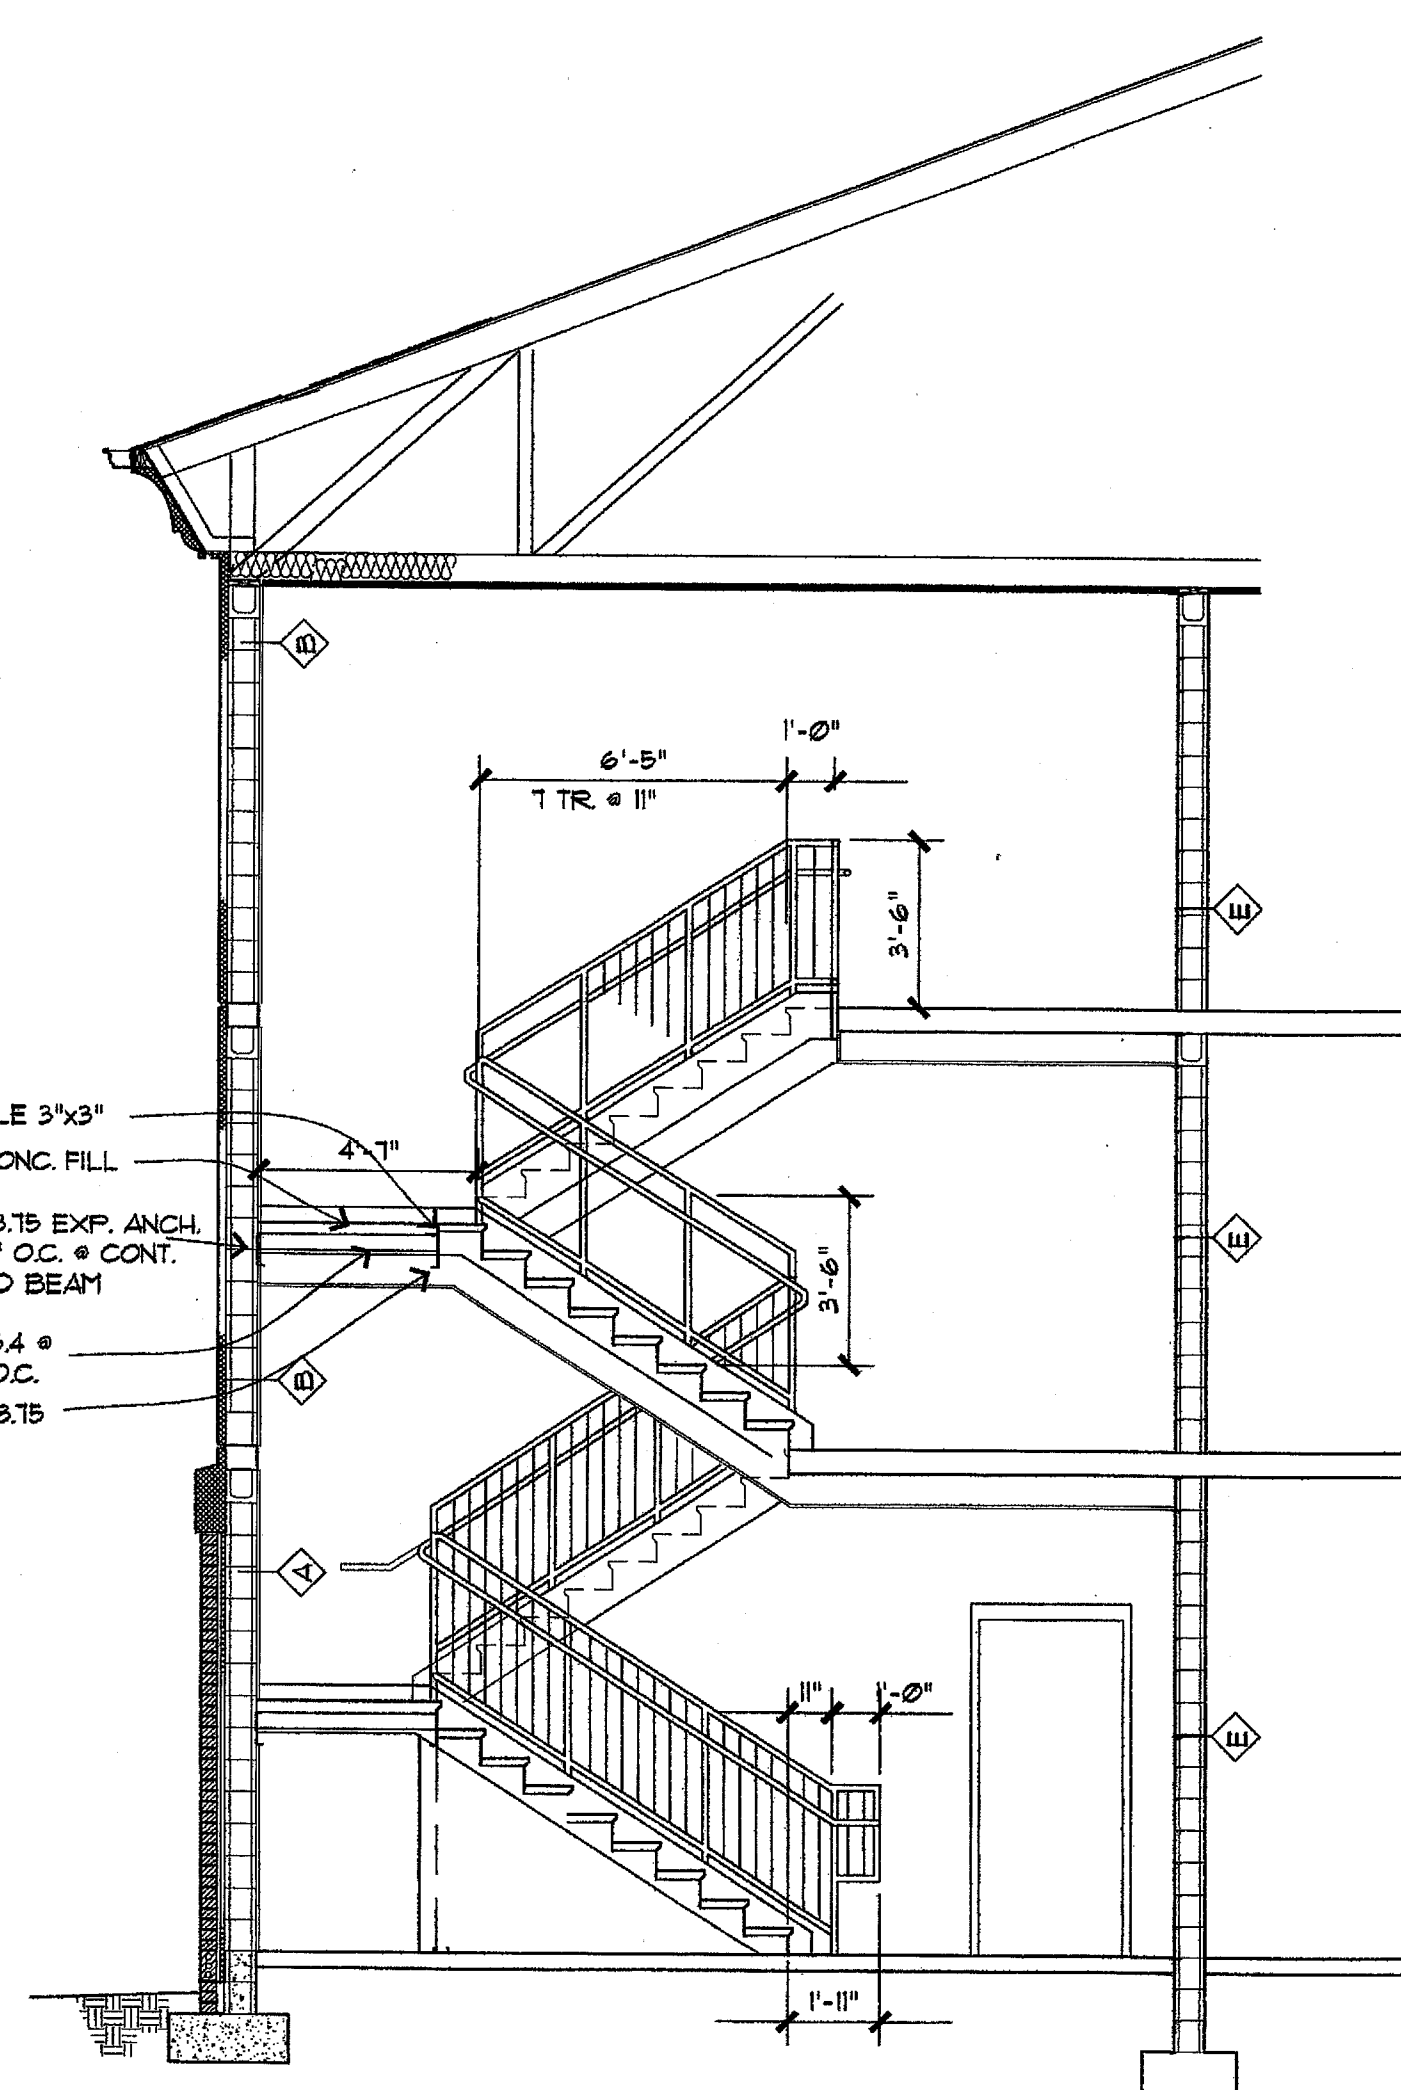

7 STAIR SECTION
1/4" = 1'-0"

PROJECT NAME:

Holiday Inn Express
HOTEL & SUITES
Underwood Road
Vicksburg, MS 38671

SHEET TITLE:

PROJECT NO.
01005

LATEST REVISION:

DRAWN BY: CHECKED BY:

SHEET NUMBER:

DATE:
6/3/02

A503