

**ELECTRICAL LEGEND**

REFER TO ELECTRICAL DETAILS SHEET

\$	SINGLE POLE SWITCH	\$T	TIMER SWITCH
\$3	THREE WAY SWITCH	\$M	MOTOR SWITCH
\$4	FOUR WAY SWITCH	\$F	CEILING FAN CONTROL
\$D	SWITCH WITH 3/4" LOAD SIZE AND 800 WATTS IS THE MINIMUM SIZE PERMITTED	\$K	KEYED SWITCH
\$D	HEAVY DUTY RECEPTACLE		

⊕	DUPLEX RECEPTACLE, GROUND POLE UP
⊕ WP	WEATHERPROOF DUPLEX GF RECEPTACLE, GROUND POLE UP
⊕	DUPLEX RECEPTACLE BOTTOM OUTLET SWITCHED, GROUND POLE UP
⊕	SINGLE RECEPTACLE, 20 AMP, 125-VOLT EXCEPT AS NOTED
⊕	DUPLEX GF RECEPTACLE
⊕	DOUBLE DUPLEX RECEPTACLE, GROUND POLE UP
⊕	DUPLEX FLOOR OUTLET, PROVIDE 3/4" TO ACCESSIBLE CEILING.
⊕	DOUBLE DUPLEX FLOOR OUTLET, PROVIDE 3/4" TO ACCESSIBLE CEILING.
⊕	JUNCTION BOX
⊕	FAN UNIT - SEE MECHANICAL
•	RISE IN WALL FOR EITHER PFC UNITS OR LIGHTING CIRCUITS.
⊕	WALKER RFB4 FLUSH FLOOR BOX W/ 30 AMP, 120 VOLT RECEPTACLE PROVIDE 3/4" TO ACCESSIBLE CEILING FOR POWER (VERIFY TRIM AND COLOR WITH ARCHITECT)
⊕	WALKER RFB4 FLUSH FLOOR BOX W/ 20 AMP, DOUBLE DUPLEX 120 VOLT RECEPTACLE & TELEPHONE/DATA OUTLETS, PROVIDE 3/4" TO ACCESSIBLE CEILING FOR POWER AND 2-1/4" TO ACCESSIBLE CEILING FOR TELEPHONE/DATA (VERIFY TRIM AND COLOR WITH ARCHITECT)
⊕	DECORATIVE PENDANT FIXTURE
⊕	CONTINUOUS LOW VOLTAGE INCANDESCENT LIGHT STRIP
⊕	UNDER CABINET FLUORESCENT LIGHT FIXTURE
⊕	LAVAN FLUORESCENT LIGHT FIXTURE
⊕	SURFACE MOUNTED FLUORESCENT LIGHT FIXTURE
⊕	EMERGENCY FIXTURE (REPRESENTED BY THE SHADING)
⊕	FLUORESCENT STRIP
⊕	INCANDESCENT LIGHT
⊕	WALL WASHER
⊕	WALL MOUNTED LIGHT FIXTURE
⊕	CEILING MTD FIXTURE
⊕	WALL MOUNTED VANIITY LIGHT FIXTURE
⊕	WALL MOUNTED FLUORESCENT LIGHT FIXTURE
⊕	POLE MOUNTED FIXTURE
⊕	PHOTO CELL
⊕	EXIT SIGN - SINGLE FACE, CEILING OR WALL MOUNTED AS INDICATED
⊕	EXIT SIGN - DOUBLE FACE W/ DIRECTION
⊕	EXIT SIGN / EMERGENCY LIGHT COMBO
⊕	PANLEBOARD
⊕	TRANSFORMER
⊕	COMB. MAG STR. FUSED DISCONNECT
⊕	COMB. MAG STR/IRON-FUSED DISCONNECT
⊕	DISCONNECT SWITCH
⊕	FUSED DISCONNECT SWITCH
⊕	MOTOR
⊕	EQUIPMENT
⊕	TELEPHONE OUTLET BOX
⊕	COMBO TELEPHONE & DATA OUTLET BOX
⊕	DATA CONNECTION
⊕	DESK INTERCOM
⊕	CEILING MOUNTED SPEAKER
⊕	WALL MOUNTED SPEAKER
⊕	BELL / STROBE INDICATOR
⊕	TELEPHONE STROBE INDICATOR
⊕	DOORBELL BUTTON
⊕	TELEVISION ANTENNA OUTLET
⊕	FLUSH FLOOR TELEVISION ANTENNA OUTLET, PROVIDE 3/4" TO ACCESSIBLE C.G.
⊕	SECURITY SYSTEM CAMERA, VERIFY ELECTRICAL REQUIREMENTS
⊕	SECURITY SYSTEM VENDOR BEFORE ROUGHIN.
EDF	ELECTRIC DRINKING FOUNTAIN
WP	WEATHERPROOF
AFP	ABOVE FINISHED FLOOR
GF	GROUND FAULT INTERRUPTER
*48"	CENTERLINE MOUNTING HEIGHT ABOVE FINISHED FLOOR
AC	ABOVE COUNTER
M.O.D.	MOTOR OPERATED DAMPER
●	FIRE ALARM MANUAL PULL STATION MOUNTED AT 48" A.F.F.
⊕	BUILDING SYSTEM FIRE ALARM STROBE DEVICE, -80" TO CENTERLINE
⊕	BUILDING SYSTEM FIRE ALARM HORN/STROBE DEVICE, -80" TO CENTERLINE
⊕	NAC MODULE
⊕	SMOKE DETECTOR, -80" TO CENTERLINE
⊕	SMOKE DETECTOR W/SOUNDER BASE, -80" TO CENTERLINE
⊕	FIRE ALARM HEAT DETECTOR
⊕	FIRE ALARM DUCT DETECTOR
⊕	CEILING MOUNTED CARBON MONOXIDE DETECTOR
⊕	FLOW AND TAMPER SWITCHES
⊕	REMOTE ANNUNCIATOR PANEL
⊕	FIRE ALARM CONTROL PANEL
⊕	MAGNETIC HOLD OPEN FOR DOOR
⊕	SINGLE GANG JUNCTION BOX, FLUSH IN WALL FOR MICROPHONE OUTLET
⊕	CARD READER - BATTERY OPERATED - LOCATED ON DOOR
⊕	CARD READER - HARD WIRE CONNECTION
⊕	DOOR LOCK FOR LINEAL CHUTE
⊕	CLOCK HANGER OUTLET
EMB	EMERGENCY BALLAST

**LIGHTING NOTES:**

- ALL RECESSED LIGHTING FIXTURES SHALL HAVE THERMAL PROTECTION AND SHALL BE IDENTIFIED AS "THERMALLY PROTECTED".
- FINISHES SHALL BE COORDINATED WITH THE OWNER/ARCHITECT.
- ALL LAMPS SHALL BE "WARM WHITE", U.N.O.
- PROVIDE ELECTRONIC BALLASTS FOR FLUORESCENT FIXTURES EQUAL TO THE QUALITY OF OSRAM, ADVANCE, AND MAGNETEC.
- CONNECT ALL EXIT SIGNS TO AN UNSWITCHED HOT CONDUCTOR FROM THE SAME EMERGENCY CIRCUIT THAT SERVES THE ROOM IN WHICH IS LOCATED.
- PROVIDE LENS COVERS FOR ALL LIGHT FIXTURES IN THE FOOD SERVICE AREA AND THE BIK.
- REFER TO "D" DRAWINGS FOR ALL FIXTURE MOUNTING HEIGHTS.
- PROVIDE STANDARD ELECTRONIC BALLASTS FOR FIXTURES THAT ARE NOT ON DIMMERS.

**LIGHTING FIXTURE SCHEDULE**

CALLOUT	SYMBOL	LAMP	DESCRIPTION	BALLAST	MOUNTING	MODEL	IN/OUT # Watts	VOLTS	NOTES
A	⊕	(1) A-19 40 WATT, 130 VOLT INCANDESCENT LAMPS	UNLIGHT 8" DIA. X 7" OAH WITH SATIN FINISH #172 AND HONEY ONYX ACRYLIC IAL 187	NA	CEILING SUSPENDED	UNLIGHT SONG STYLE	860	120V 1P 2W	PROVIDE WITH 4 1/2" DIA. CANOPY AND INTEGRAL TRANSFORMER, WHITE CHROME FINISH.
A1	⊕	20W MINI STAR LAMP, G13.5 SOCKET	PENDANT MINI-SPOT WITH INTEGRAL 75W TRANSFORMER	NA	PENDANT	BRUCK LIGHTING #22710M20-ZW W/ 42420ZM2C 75W TRANSFORMER	20	120V 1P 2W	
B	⊕	(6) A-19 40 WATT, 130 VOLT INCANDESCENT LAMPS	UNLIGHT 30" DIA. X 24" OAH WITH SATIN FINISH #172 AND HONEY ONYX ACRYLIC IAL 187	NA	CEILING SUSPENDED	UNLIGHT SONG STYLE	240	120V 1P 2W	
C	⊕	(6) A-19 40 WATT, 130 VOLT INCANDESCENT LAMPS	UNLIGHT 30" DIA. X 30" OAH WITH SATIN FINISH #172 AND HONEY ONYX ACRYLIC IAL 187	NA	CEILING SUSPENDED	UNLIGHT SONG STYLE	300	120V 1P 2W	
D	⊕	(12) A-19 40 WATT, 130 VOLT INCANDESCENT LAMPS	UNLIGHT 30" DIA. X 30" OAH WITH SATIN FINISH #172 AND HONEY ONYX ACRYLIC IAL 187	NA	CEILING SUSPENDED	UNLIGHT MARCO STYLE	480	120V 1P 2W	
E	⊕	(6) A-19 40 WATT, 130 VOLT INCANDESCENT LAMPS	UNLIGHT 48" DIA. X 48" OAH WITH SATIN FINISH #172 AND HONEY ONYX ACRYLIC IAL 187	NA	CEILING SUSPENDED	MARCO STYLE 4130481	300	120V 1P 2W	
E1	⊕		BOARD ROOM PENDANT	NA	CEILING SUSPENDED			120V 1P 2W	TO BE SPECIFIED BY OWNER (NOT TO EXCEED 200 WATTS)
F	⊕	(13) GY.6.5 BASE 35 WATT XELOGEN LAMPS	LBL LIGHTING 20.875" DIA. X 66.5" OAH WITH SATIN NICKEL FINISH AND FROSTED GLASS DIFFUSER	NA	CEILING SUSPENDED	LBL TUBES SEVEN SUSP. STYLE #R5792921	455	120V 1P 2W	
G	⊕	(13) GY.6.5 BASE 35 WATT XELOGEN LAMPS	LBL LIGHTING 20.875" DIA. X 80" OAH WITH SATIN NICKEL FINISH AND FROSTED GLASS DIFFUSER	NA	CEILING SUSPENDED	LBL TUBES SEVEN SUSP. STYLE #R5792921 (CUSTOM)	455	120V 1P 2W	FIXTURE SAME AS TYPE F EXCEPT CUSTOM OAH IS 80"
H	⊕	(1) B-19 40 WATT, 130 VOLT INCANDESCENT LAMPS	UNLIGHT 27" DIA. X 18" OAH WITH SATIN FINISH #172 AND BLUE GLASS DIFFUSER	NA	CEILING SUSPENDED	UNLIGHT CUSTOM FIXTURE BASED ON L-680	1600	120V 1P 2W	
I	⊕	(2) B-19 40 WATT, 130 VOLT INCANDESCENT LAMPS	UNLIGHT 30" DIA. X 30" OAH WITH SATIN FINISH #172 AND YELLOW GLASS DIFFUSER	NA	CEILING SUSPENDED	UNLIGHT CUSTOM FIXTURE BASED ON L-680	840	120V 1P 2W	SEE NOTE 7.
J	⊕	(2) B-19 40 WATT, 130 VOLT INCANDESCENT LAMPS	UNLIGHT 30" DIA. X 30" OAH WITH SATIN FINISH #172 AND RED GLASS DIFFUSER	NA	CEILING SUSPENDED	UNLIGHT CUSTOM FIXTURE BASED ON L-680	840	120V 1P 2W	
K	⊕	(2) B-19 40 WATT, 130 VOLT INCANDESCENT LAMPS	UNLIGHT 30" DIA. X 30" OAH WITH SATIN FINISH #172 AND GREEN GLASS DIFFUSER	NA	CEILING SUSPENDED	UNLIGHT CUSTOM FIXTURE BASED ON L-680	840	120V 1P 2W	
L	⊕	(4) 1'-0" 40 WATT, 130 VOLT INCANDESCENT LAMPS	UNLIGHT 18" DIA. X 4" PROJECTION WITH SATIN FINISH #172 AND HONEY ONYX ACRYLIC IAL 187	NA	WALL SCONCE	UNLIGHT SONG STYLE	160	120V 1P 2W	
M	⊕	(2) 32 WATT TRIPLE TUBE CFL 3500° K	RECESSED OPEN DOWNLIGHT WITH PEWTER REFLECTOR AND (2) DIMMABLE 32W CFL LAMPS	SEE SCHEDULE NOTES	RECESSED	LITHONIA IAF 242TRT EPR 120	65	120V 1P 2W	
N	⊕	(2) 32 WATT TRIPLE TUBE CFL 3500° K	RECESSED OPEN DOWNLIGHT WITH PEWTER REFLECTOR AND (2) DIMMABLE 32W CFL LAMPS	SEE SCHEDULE NOTES	RECESSED	LITHONIA IAF 242TRT EPR 120	65	120V 1P 2W	
P1	⊕	(1) E26 100 WATT, 130 VOLT INCANDESCENT LAMPS	ILEX 14" Hx 6.25" Wx 4" OAH WITH BRUSHED NICKEL FINISH AND KNOLL IMAGO DIFFUSER	NA	CEILING SUSPENDED	ILEX MODEL TAO #FAO-SHAL-U	100	120V 1P 2W	FIXTURE MOUNTED AT BUFFET
P2	⊕	(1) E26 100 WATT, 130 VOLT INCANDESCENT LAMPS	ILEX 14" Hx 6.25" Wx 4" OAH WITH BRUSHED NICKEL FINISH AND KNOLL IMAGO DIFFUSER	NA	CEILING SUSPENDED	ILEX MODEL TAO #FAO-SHAL-U	100	120V 1P 2W	FIXTURE MOUNTED AT BOOTHS CONFIRM MOUNTING HEIGHT WITH ARCHITECT. CENTER ON BOOTHS, COORDINATE WITH FURNITURE
Q	⊕	(2) 28 WATT TRIPLE TUBE CFL 3500° K	RECESSED OPEN DOWNLIGHT WITH PEWTER REFLECTOR AND (2) DIMMABLE 28W CFL LAMPS	SEE SCHEDULE NOTES	RECESSED	LITHONIA IAF 242TRT EPR 120	55	120V 1P 2W	SEE NOTE 7.
R	⊕	(2) 13 WATT CFL 3500° K LAMP	SCIENCE 13.75" H x 11.5" W x 3.875" PROJ FOR POOL AREA WITH POLYCARBONATE LENS	SEE SCHEDULE NOTES	SURFACE	LBL STINGRAY VENUS #PW628AM213NM	30	120V 1P 2W	
S	⊕	(2) 18 WATT TRIPLE TUBE CFL 3500° K	RECESSED DOWNLIGHT WITH 2 CFL LAMPS, WHITE BAFFLE WITH POLYCARBONATE LENS, VET LOCATION LISTED	SEE SCHEDULE NOTES	RECESSED	LITHONIA IAF 242TRT EPR 120	85	120V 1P 2W	
T	⊕	(1) 28 WATT TRIPLE TUBE CFL 3500° K	RECESSED OPEN DOWNLIGHT WITH 28W CFL LAMP, PEWTER REFLECTOR	SEE SCHEDULE NOTES	RECESSED	LITHONIA IAFV 28TRT EPR 120	30	120V 1P 2W	
U	⊕	(1) 32 WATT TRIPLE TUBE CFL 3500° K	RECESSED OPEN DIMMABLE DOWNLIGHT WITH WALL WASHER KICKER AND PEWTER REFLECTOR	SEE SCHEDULE NOTES	RECESSED	LITHONIA IAF PW 32TRT EPR 120	35	120V 1P 2W	
V1	⊕	(1) 32 WATT MR16 LOW VOLTAGE DOWNLIGHT	RECESSED OPEN DOWNLIGHT WITH 12 VOLT TRANSFORMER AT FIXTURE FOR 35 WATT LAMP	NA	RECESSED	AMERICAN FLUORESCENT MNS SERIES #MNS2183NEC	50	120V 1P 2W	
V2	⊕	(1) 75 WATT MR16 LOW VOLTAGE DOWNLIGHT	RECESSED OPEN 4" DOWNLIGHT WITH 12 VOLT TRANSFORMER AT FIXTURE FOR 75 WATT LAMP	NA	RECESSED	AMERICAN FLUORESCENT MNS SERIES #MNS2183NEC	75	120V 1P 2W	
W	⊕	(2) 18 WATT QUAD TUBE CFL 3500° K	SURFACE MOUNTED SCONCE 18" H x 7 1/4" W x 4" PROJ FOR CORRIDORS	SEE SCHEDULE NOTES	WALL	AMERICAN FLUORESCENT MNS SERIES #MNS2183NEC	40	120V 1P 2W	SEE NOTE 7.
W1	⊕		SURFACE MOUNTED SCONCE	SEE SCHEDULE NOTES	WALL			120V 1P 2W	TO BE SPECIFIED BY OWNER (NOT TO EXCEED 50 WATTS)
X	⊕	(3) 13 WATT TWIN TUBE CFL 3500° K	SURFACE MOUNTED CEILING FIXTURE 27"0 x 5-1/4" H FOR CORRIDORS	SEE SCHEDULE NOTES	RECESSED	AMERICAN FLUORESCENT IAF SERIES #IF1518N	30	120V 1P 2W	
Y	⊕	(2) 13 WATT QUAD TUBE CFL 3500° K	SURFACE MOUNTED SCONCE 21" DIAMETER x 5-1/4" H FOR MEETING ROOMS WITH DIMMABLE CFL	SEE SCHEDULE NOTES	SURFACE	UNLIGHT POLO STYLE	30	120V 1P 2W	FIXTURE MOUNTED 60" AFF TO CENTER OF FIXTURE
Y1	⊕		BOARD ROOM WALL SCONCE	SEE SCHEDULE NOTES	SURFACE			120V 1P 2W	TO BE SPECIFIED BY OWNER (NOT TO EXCEED 50 WATTS)
Z	⊕	(3) 16 WATT INCANDESCENT LAMPS	SURFACE MOUNTED SCONCE AT VANITY IN PUBLIC RESTROOMS (3) 40W 130 VOLT LAMPS	NA	SURFACE	KICKLER #5403 NI	120	120V 1P 2W	SEE NOTE 7.
AA	⊕	(3) 32 WATT 78 3500°K, 70-CRI	RECESSED LENSED 34-AMP FLUORESCENT TROFFER WITH ELECTRONIC BALLAST	SEE SCHEDULE NOTES	RECESSED	LITHONIA IZSPRG 332 A12725 120 105EB	85	120V 1P 2W	
BB	⊕	(4) 32 WATT 78 3500°K, 70-CRI	RECESSED LENSED 4-LAMP FLUORESCENT TROFFER WITH ELECTRONIC BALLAST	SEE SCHEDULE NOTES	RECESSED	LITHONIA IZSPRG 6 332 A12725 120 148EB	115	120V 1P 2W	
CC	⊕	(3) 32 WATT 78 3500°K, 70-CRI	RECESSED 3" PARABOLIC 3-LAMP FLUORESCENT TROFFER WITH ELECTRONIC BALLAST	SEE SCHEDULE NOTES	RECESSED	LITHONIA IZPMAN G B 3 32 18 LD 120 103 GEB	85	120V 1P 2W	
DD	⊕	(2) 32 WATT 78 3500°K, 70-CRI	4 FLUORESCENT STRIP	SEE SCHEDULE NOTES	CEILING	LITHONIA IZPMAN G B 3 32 18 LD 120 103 GEB	62	120V 1P 2W	WITH WIRE GUARD AND LAMP SHIELDS
EE	⊕	(3) 32 WATT 78 3500°K, 70-CRI	FLUORESCENT WALL BRACKET	SEE SCHEDULE NOTES	WALL	LITHONIA WS 2.8 A19 120 GEB	62	120V 1P 2W	STARWELL SEE NOTE 7.
FF	⊕	(1) 100W A19	ELEVATOR PIT LIGHT	NA	WALL	STONCO OR EQUAL VWAL-11-GC	100	120V 1P 2W	ELEV PIT
GG	⊕	FIBER OPTIC	FIBER OPTIC LIGHT IN COVE	NA	SURFACE MOUNT IN COVE	PAC LIGHTING E3385-1A12		120V 1P 2W	MOUNT IN COVE PER MANUFACTURERS RECOMMENDATIONS. PROVIDE ALL NECESSARY HARDWARE FOR INSTALLATION. VERIFY LENGTH BEFORE ORDERING.
HH	⊕	(3) 13 WATT QUAD TUBE CFL 3500° K	SURFACE MOUNTED SCONCE 16"0 x 4" PROJ FOR 1ST FLOOR ELEVATOR LOBBY WITH DIMMABLE CFL	SEE SCHEDULE NOTES	SURFACE	ECLIPSE #PW142C-315-1HE	40	120V 1P 2W	FIXTURE MOUNTED 60" AFF TO CENTER OF FIXTURE (SEE NOTE 7).
II	⊕	50W INCANDESCENT	SURFACE MOUNTED SCONCE AT VANITY OF GUESTROOMS	SEE SCHEDULE NOTES	SURFACE	AS SPECIFIED BY INTERIOR DESIGNER		120V 1P 2W	NOT TO EXCEED 50 WATTS
JJ	⊕	(1) 32 WATT TRIPLE TUBE CFL 3500° K	RECESSED DOWNLIGHT WITH 128W CFL LAMP, WHITE BAFFLE WITH FRESNEL LENS, VET LOCATION LISTED	SEE SCHEDULE NOTES	RECESSED	LITHONIA IALGF 126TRT 6 RW FFL 120	30	120V 1P 2W	
KK	⊕	(3) 1 WATT 78 3500°K, 70-CRI	RECESSED 2" x 3" PARABOLIC 3-LAMP FLUORESCENT TROFFER WITH DIMMING BALLAST	SEE SCHEDULE NOTES	RECESSED	LITHONIA IZPMAN G B 3 17 18 120	51	120V 1P 2W	PROVIDED WITH LUTRON H-LUME BALLAST.
LL	⊕	35W PAR 20 QUARTZ HALOGEN	4" RECESSED PAR 20 DOWNLIGHT	SEE SCHEDULE NOTES	RECESSED	LITHONIA HOUSING #L3R WITH TRM 602	35	120V 1P 2W	
MM	⊕		TOILET DECORATIVE WALL LIGHT	SEE SCHEDULE NOTES	SURFACE			120V 1P 2W	TO BE SPECIFIED BY OWNER (NOT TO EXCEED 50 WATTS)
NN	⊕		BUSINESS CENTER PENDANT	SEE SCHEDULE NOTES	PENDANT			120V 1P 2W	TO BE SPECIFIED BY OWNER (NOT TO EXCEED 100 WATTS)
OO	⊕		PRE-FUNCTION WALL SCONCES	SEE SCHEDULE NOTES	SURFACE			120V 1P 2W	TO BE SPECIFIED BY OWNER (NOT TO EXCEED 50 WATTS)
PP	⊕		LOBBY WALL SCONCES	SEE SCHEDULE NOTES	SURFACE			120V 1P 2W	TO BE SPECIFIED BY OWNER (NOT TO EXCEED 50 WATTS)
XX1	⊕	LED	EXIT LIGHT BACK OF HOUSE	ELECTRONIC	CEILING	DUAL LIGHT 6658W1E1 DUAL FACE REARWET LEC-SR161E1 FAP	5	120V 1P 2W	BATTERY BACKUP CHEMIONS PER DIMS
XX2	⊕	LED	EXIT LIGHT DECORATIVE	ELECTRONIC	CEILING	DUAL LIGHT 6658W1E1 DUAL FACE REARWET LEC-SR161E1 FAP	5	120V 1P 2W	BATTERY BACKUP CHEMIONS PER DIMS

NOTE: REFER TO SITE PLAN, SHEET E00, FOR SITE LIGHTING FIXTURE SCHEDULE



803 S. MOUNT MORIAH SUITE 1008  
MEMPHIS, TN 38117  
(901) 683-7175 p.  
(901) 683-2385 f.  
im@iwaarchitects.com


NO.	ISSUED	DATE
1	ISSUED	10/26/07

**CONSULTANTS**  
STRUCTURAL:  
SK INTERNATIONAL, INC.  
130 SOUTH MAIN STREET  
HUNTSVILLE, AL 35811  
(256) 852-3088

**MECHANICAL:**  
CRABTREE ENGINEERING  
726 S. MT. MORIAH  
MEMPHIS, TN 38117  
(901) 787-9888

**PLUMBING:**  
CRABTREE ENGINEERING  
726 S. MT. MORIAH  
MEMPHIS, TN 38117  
(901) 787-9888

**ELECTRICAL:**  
CHS ENGINEERING  
726 S. MT. MORIAH  
MEMPHIS, TN 38117  
(901) 787-2557

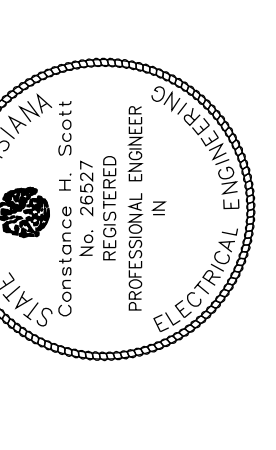

**Holiday Dnn** MILLENNIUM  
BOSSIER CITY,  
LOUISIANA

**SHEET NAME**  
LIGHTING FIXTURE  
SCHEDULE AND  
ELECTRICAL  
LEGEND

DATE 10/26/07

DRAWN BY JSH

CHECKED BY CHS

FILE NAME

SCALE NONE

PROJECT NO. 1507

DRAWING