


REVISIONS		
No.	Date	Description

Information contained on this drawing and in all digital files associated is authorized for use on the project named herein only and is the property of MISHRA ARCHITECTURE PLLC and may not be reproduced in any manner without express written or verbal permission from authorized individuals. Original drawing is 24"x36" and scales are as indicated. © 2013 MISHRA ARCHITECTURE PLLC

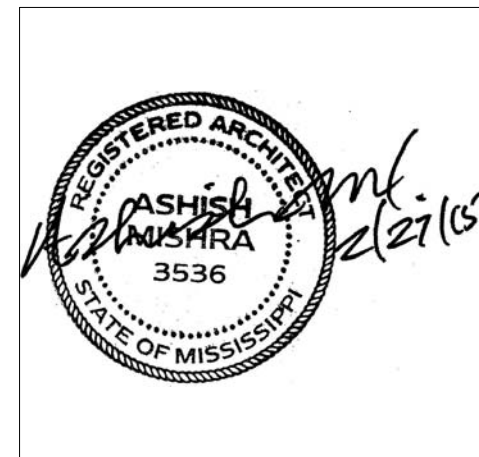

KEY PLAN

Shiva Southaven Inc.

Holiday Inn Express & Suites


Lot 16 (Rev Lot 3) Southcrest Pkwy.
Southcrest Subdivision
Southaven, MS 38671

Drawing Title
Firewall Plan 4th Floor

Phase
Construction Documents

Project No.	14-081	Sheet No.	
Prepared by	Author	A804	
Checked by	Checker		
Date	Feb. 27, 2015		

Review

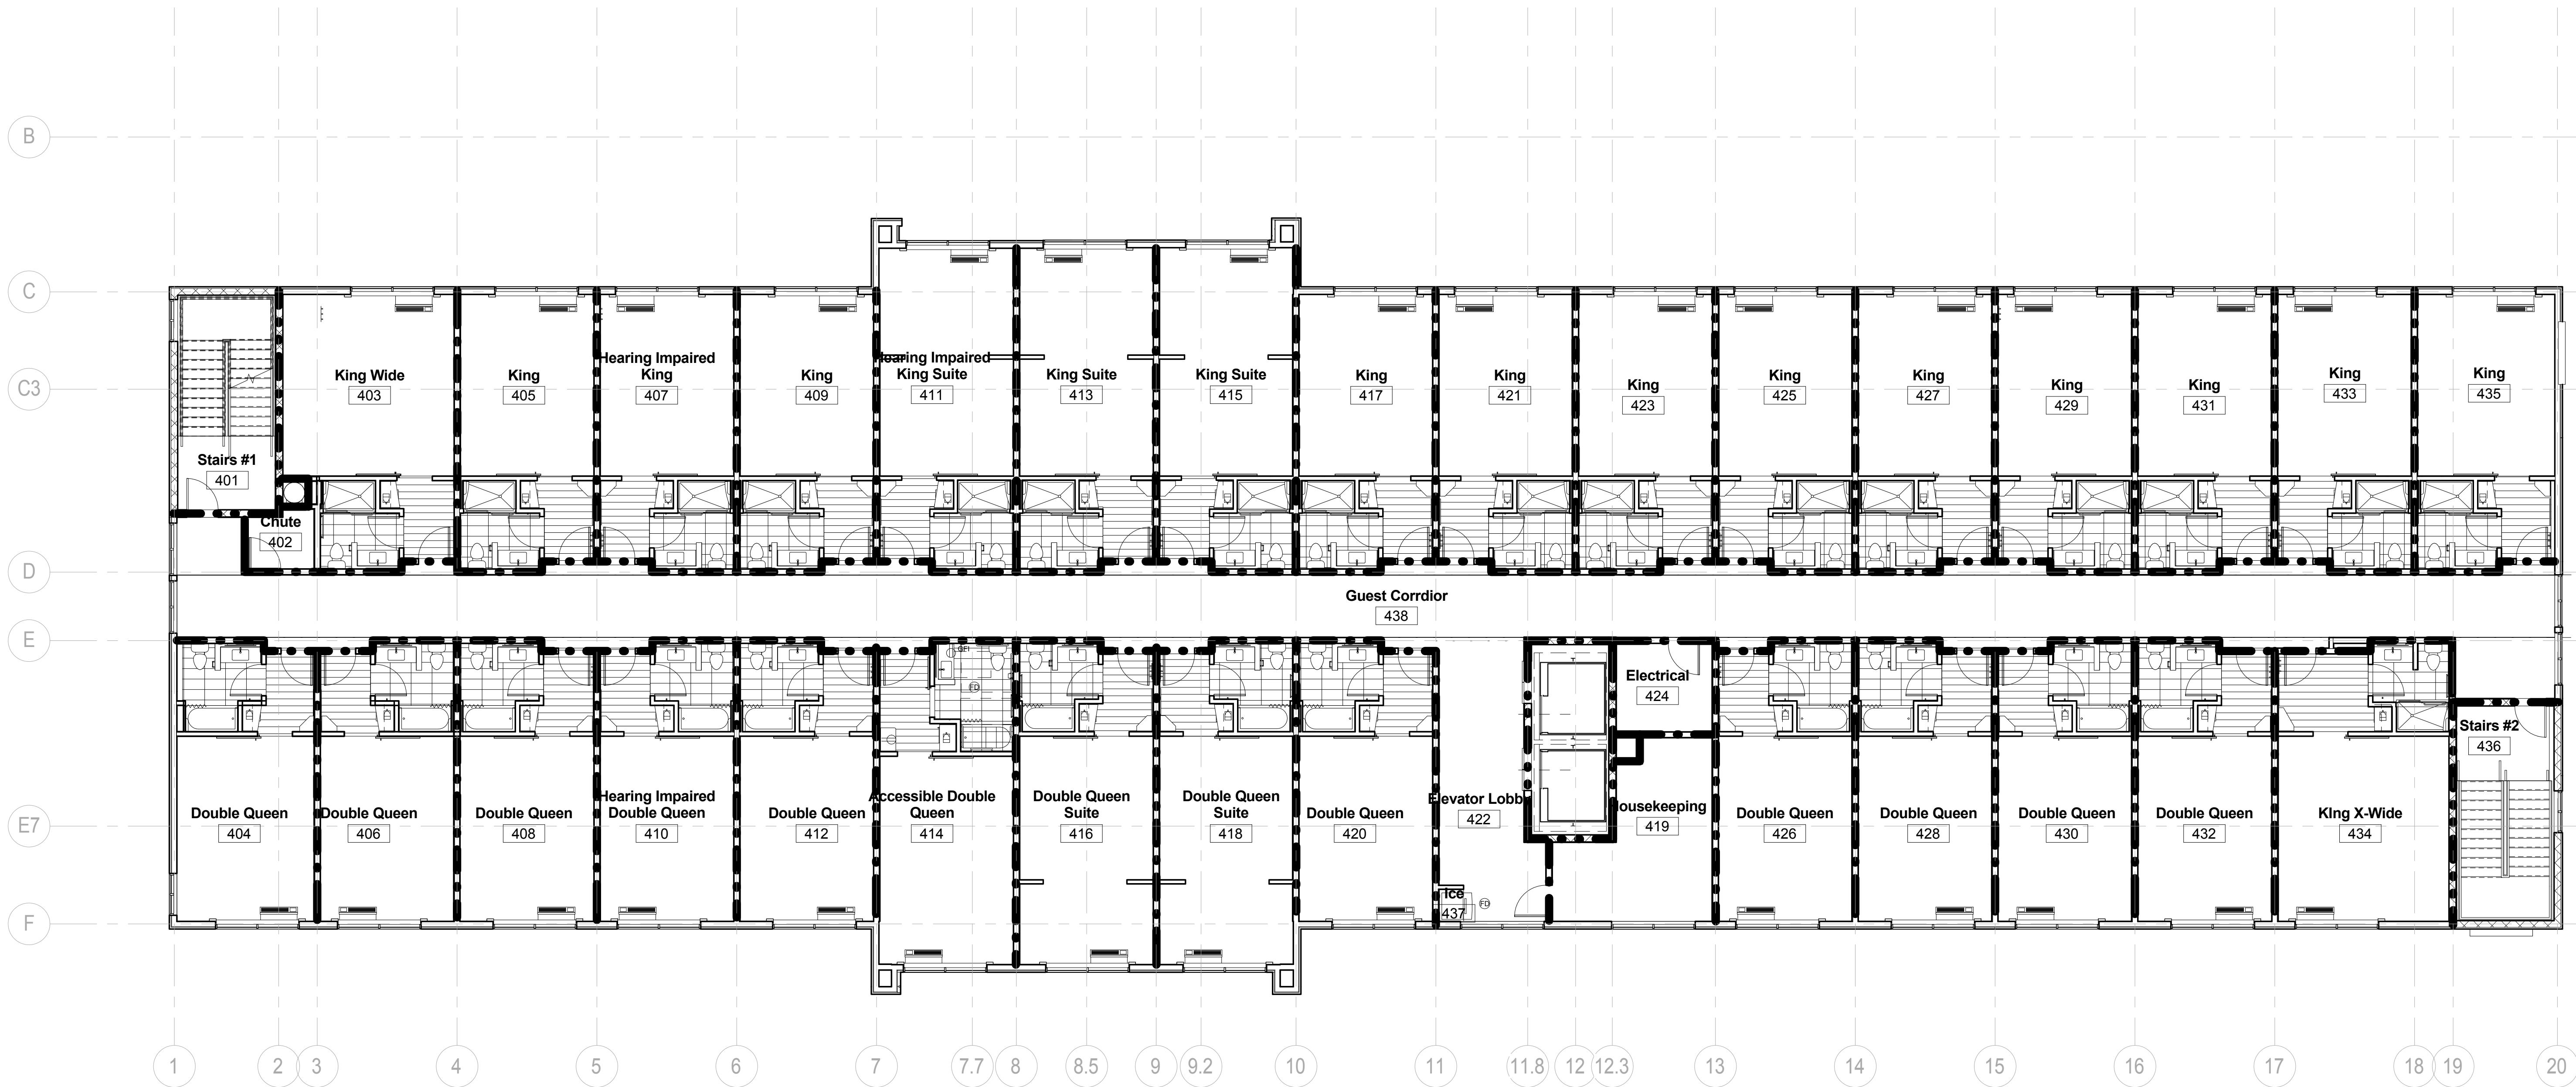

Level	Space	Area Sq. Ft.	Occupancy Classification	Area/Occupant Load	Occupant Load
1ST	ASSEMBLY	2,717	A-3	15	181
1ST	STORAGE/MECH.	1,430	S-2	300	5
1ST	LAUNDRY	469	F-1	100	5
1ST	OFFICE	651	B	100	7
1ST	RESIDENTIAL	6,318	R-1	200	32
2ND	RESIDENTIAL	10,492	R-1	200	52
2ND	STORAGE/MECH.	727	S-2	300	2
3 TO 5	RESIDENTIAL	10,823	R-1	200	54
3 TO 5	STORAGE	396	S-2	300	1

FIRE WALL LEGEND

INDICATES ONE HOUR FIRE RATED WALL CONSTRUCTION AS PER UL STANDARDS

INDICATES TWO HOUR FIRE RATED WALL CONSTRUCTION AS PER UL STANDARDS

NOTE:
ALL FIRE-RATED WALLS TO EXTEND TO STRUCTURE ABOVE AS PER FIRECODE.
ALL OPENINGS AND PENETRATIONS IN FIRE RATED WALLS NEED TO MEET CODE REQUIREMENTS
ALL DEMISING WALLS BETWEEN GUEST ROOMS TO BE 1 HOUR FIRE RATED.
ALL CORRIDOR WALLS TO BE 1 HOUR FIRE RATED.
ALL VERTICAL SHAFTS BETWEEN FLOORS TO BE 2 HOUR FIRE RATED.
ALL MECHANICAL ROOMS TO BE 2 HOUR FIRE RATED.