

P8222 Series

LED Flush Mount • Wet Location



Specifications:

Description:

The P8222 delivers a solution for flush mount, for both residential and commercial markets. In addition, the P8222 is wet located and is a cost effective solution for fire rated application. The P8222 features a 120V alternating current source and eliminates the need for a traditional LED driver. This modular approach results in an encapsulated luminaire that unites performance, cost and safety benefits.

Construction:

- Diffused polycarbonate lens controls direct glare from the LEDs
- Simple snap in installation for J-Box
- Die-cast aluminum construction with a powder coat paint finish
- Can be installed in a 4" J-Box
- Lumen output and distribution comparable to a 100W incandescent lamp
- Suitable for use in IC or NON-IC Applications with 25°C (77°F) continuous room side ambient temperature.

Performance:


Input Power	17W
Input Voltage	120V
Input Frequency	60Hz
Lumens	1032 (LM-79)
CCT	3000K
CRI	90+
LPW	60
Life	42,000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Min. Start Temp	-30° C
Max. Operating Temp	30° C
Warranty	5 yrs.
Labels	cCSAus classified for wet locations ENERGY STAR® qualified

P8222-28/30K9-AC1-L10

Images:




Dimensions:

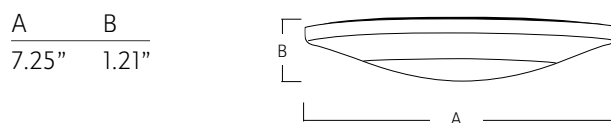


Included Mounting Options:

J-Box Mount



J-Box
Adapter



Catalog number:

Base	Finish	Color Temp	Voltage	Lumen Package
P8222	28 - White	30K9 - 3000K 90 CRI	AC1 - 120V	L10 - 1032 Lumens