

Sheet A610
bmanapanelizer@llc@yahoo.com
Attention Bill Mann

1. All Hollow Metal Frames Are Welded
Rough Openings

4 1/2" wider than schedule size
2 1/2" taller than schedule size

2. All Storefronts
Rough Openings

1/2" wider than schedule size
1/2" taller than schedule size

3. Windows

Type A	R.O.	46 7/8 w x 101 1/8 H
Type A Full	R.O.	46 7/8 w x 101 1/8 H
Type B	R.O.	46 7/8 w x 90 1/4 H
Type B Full		46 7/8 w x 90 1/4 H
Type C		60 1/2 w x 73 3/4 H
Type D		46 1/2 w x 46 1/2 H


11/8/16

HOME 2 SUITES FLOWOOD, MS


ELEVATIONS

Description:


QUAKER
COMMERCIAL
PHONE (873) 744-5211
FAX (873) 744-5586
P.A.R.
604 Highway 83 South
Freeburg, MO 65035
12-05-15
Sheet # A2

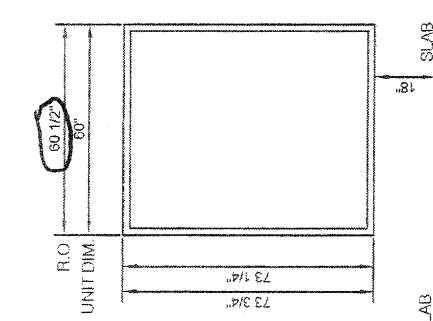


TYPE C
K200 DS
1" CLR INS GLS W/ LOW-E & ARGON
QTY. 8
NAIL-FIN INSTALL

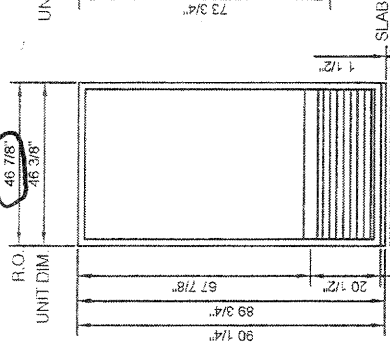


TYPE B.1 - FULL
K200-2 DS
1" CLR INS GLS W/ LOW-E & ARGON
LOUVER
FULL BLANK-OUT PANEL
SUBSILL MW23712
QTY. 4
REVISED TO SMALLEST LOUVER SIZE
NAIL-FIN INSTALL

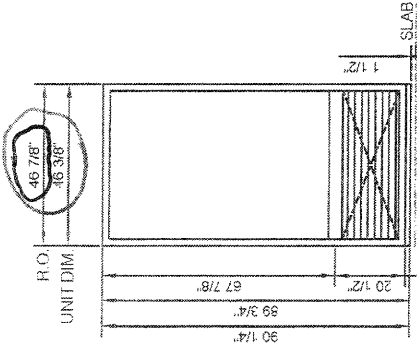

TYPE B
K200-2 DS
1" CLR INS GLS W/ LOW-E & ARGON
LOUVER
SUBSILL MW23712
QTY. 112
REVISED TO SMALLEST LOUVER SIZE
NAIL-FIN INSTALL

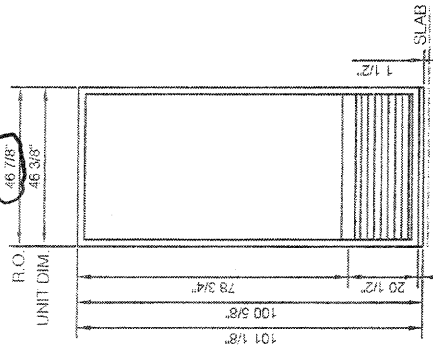

TYPE A.1 - FULL
K200-2 DS
1" CLR INS GLS W/ LOW-E & ARGON
LOUVER
FULL BLANK-OUT PANEL
SUBSILL MW23712
QTY. 4
REVISED TO SMALLEST LOUVER SIZE
NAIL-FIN INSTALL

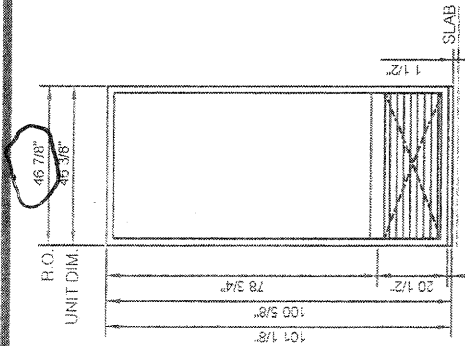


TYPE A
K200-2 DS
1" CLR INS GLS W/ LOW-E & ARGON
LOUVER
SUBSILL MW23712
QTY. 8
REVISED TO SMALLEST LOUVER SIZE
NAIL-FIN INSTALL

LEAD TIME IS 8-10 WEEKS
FROM APPROVAL DATE

GENERAL NOTES:
ELEVATIONS ARE NOT TO SCALE
WINDOWS ARE VIEWED FROM EXTERIOR
STANDARD COLOR - WHITE
STANDARD FINISH - AAMA 2604 (10 YEAR)
STANDARD HEAD & SILL FLASHING - VERIFY
GLAZING - 272 LOW-E (DUAL SILVER) - VERIFY
COUNTS AND SIZES - VERIFY
DRAIN - VERIFY
A/C UNIT - VERIFY
LOUVER WITH MANDATORY SHIM TAPE
INSULATED BLANK-OUT PANEL
ADD FOR 1/4" PANEES
ADD FOR 48" WIDE WINDOWS
ADD FOR CLEAR ANODIZED GLASS (5 YEAR)
QUOTING QUAKER'S STANDARD WARRANTY

VERIFY

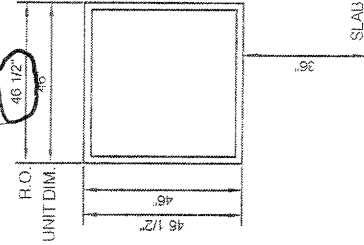

TYPE D
K200 DS
1" CLR INS GLS W/ LOW-E & ARGON
QTY. 2
NAIL-FIN INSTALL

TOTAL NUMBER OF OPENINGS
138 - OPENINGS

BUILDING PARAMETERS:
5 STORIES, STONE / EIFS

SPECIFIC GLAZING NOTES:
U-VALUE = .25 (GLASS ONLY)
SHGC = .41 (GLASS ONLY)