
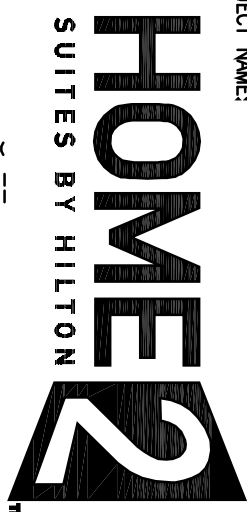


Richard Molenaar
ARCHITECT

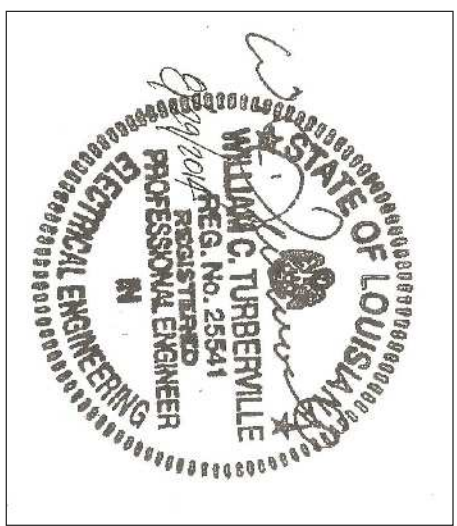

W Maine Street West Monroe, Louisiana

SHEET TITLE
TYPICAL GUEST ROOMS
ELECTRICAL PLANS

PROJECT NO.	11-12-2014
PROJ#	
DRAWN BY: SKU	CHECKED BY: SKU
DATE	E301

TYPICAL GUEST ROOM NOTES:

- 1) BACK TO BACK OUTLETS AND TRAIL WALL TYPE OUTLET BOXES SHALL NOT BE ALLOWED. BOXES SHALL BE OFFSET FROM ROOM TO ROOM TO MINIMIZE TRANSMISSION OF SOUND AND TO MAINTAIN ALL FIRE RATINGS. THE HORIZONTAL SPACE BETWEEN OUTLET BOXES SHALL BE NO LESS THAN 24" OR AS REQUIRED TO MAINTAIN ALL FIRE RATINGS. ALL OUTLET BOXES SHALL BE INSTALLED TO THE REAR OF THE ROOM. THE CONTRACTOR SHALL VERIFY ALL PLUS CORDS, CABLES & WIRES ARE COVERED BY FREE AS INTENDED.
- 2) ALL RECEPTACLES, TELEPHONE OUTLETS, TV OUTLETS, TV ANTENNA OUTLETS IN GUEST ROOMS SHALL BE MOUNTED 5' ABOVE FLOOR TO CENTER OF BOX UNLESS NOTED OTHERWISE.
- 3) ALL SWITCHES SHALL BE MOUNTED 48" ABOVE FLOOR TO CENTER OF BOX UNLESS NOTED OTHERWISE.
- 4) THE RECEPTACLES IN THE GUEST BATHROOMS SHALL BE A LEAD-ACID BATTERY BACKUP TYPE, UL LISTED RECEPTACLE WITH UP TO 48" ABOVE TO THE CENTER OF BOX.
- 5) VERIFY ALL DIMENSIONS & WIRING HEIGHTS WITH HOME 2 GUESTROOM LAYOUTS.
- 6) PROVIDE ALL FIRE CALLING AND / OR PUTTY PADS AS NECESSARY TO COMPLY WITH ALL LOCAL, STATE AND NATIONAL FIRE CODES.
- 7) SUB-UP 208V, 1-PHASE CIRCUIT BELOW P14C UNIT AND MAKE CONNECTIONS TO OUTLET IN SUB-BASE AS PER MANUFACTURER'S RECOMMENDATIONS. VERIFY ALL MANUFACTURER'S LOCATIONS, REQUIREMENT AND RECOMMENDATIONS WITH MECHANICAL CONTRACTOR PRIOR TO R.O.G.N.
- 8) GUEST ROOM SMOKE DETECTORS SHALL BE 100% STAND ALONE TYPE. THEY SHALL BE INSTALLED AS DIRECTED BY THE LOCAL FIRE MARSHALL. GUEST ROOMS WITH MULTIPLE DETECTORS SHALL BE INTERLOCKED SMOKE STATION SMOKE DETECTORS IN ALL HEARING IMPAIRED ACCESSIBLE GUEST ROOMS SHALL HAVE A 7'0" CIRCULAR MINIMUM CLEARANCE DETECTORS SHALL BE SPACED 7'0" ON C OR APPROVED EQUAL.
- 9) 120V, 1-PHASE EXCEEDING 60 FT. IN LENGTH SHALL HAVE A WIRE SIZE INCREASED A MINIMUM OF ONE SIZE. WHERE A 208V, 1-PHASE EXCEEDS 60 FT. IN LENGTH, THE WIRE SIZE SHALL BE INCREASED A MINIMUM OF ONE SIZE.
- 10) FURNISH AND INSTALL A FIRE ALARM SYSTEM AUDIO / VISUAL DEVICE IN EACH ACCESSIBLE AND HEARING IMPAIRED GUEST ROOM AND BATHROOM CONNECTED TO THE BUILDING FIRE ALARM SYSTEM. THE DETECTOR IS IN ADDITION TO THE GUEST ROOM IDOL STAND ALONE SMOKE DETECTOR.
- 11) FURNISH AND INSTALL IN ALL ACCESSIBLE AND HEARING IMPAIRED GUEST ROOM A HOTEL ROOM ANNUNCIATOR (EDWARDS #7005-65 GUEST ROOM DOOR ANNUNCIATOR). REFER TO ARCHITECTURAL DRAWINGS FOR LOCATIONS OF ALL ACCESSIBLE AND HEARING IMPAIRED GUEST ROOMS.
- 12) MOUNT LIGHT SWITCH AND THE GFI RECEPTACLE IN GUEST ROOM BATHROOM UNDER A SINGLE PLATE WHERE POSSIBLE. SEE GUEST ROOM BATHROOM WALL SWITCH DETAIL.
- 13) ALL WIRING DEVICES SHALL BE COMMERCIAL GRADE.
- 14) NOT USED - DELETED.
- 15) BATHROOM EXHAUST FAN SHALL BE CONTROLLED WITH A SEPARATE SWITCH AND THE LIGHT WITH ANOTHER SWITCH.
- 16) ALL RECEPTACLES IN WET AND/OR DAMP LOCATIONS SHALL BE GFI TYPE RECEPTACLES.
- 17) COORDINATE EXACT LOCATION OF ALL OUTLETS IN KITCHEN AREA WITH MILLWORK. SEE ARCHITECTURAL DRAWINGS.
- 18) FURNISH AND INSTALL ARC - FAULT CIRCUIT BREAKERS FOR ALL GUEST ROOM BATHROOM LIGHTING AND RECEPTACLE CIRCUITS.
- 19) ALL SWITCHES IN GUEST ROOMS SHALL BE OF THE LIGHTED TOGGLE TYPE AND MOUNTED UP 48".
- 20) ALL GUESTROOM P14C REMOTE THERMOSTATS ARE WIRELESS WITH UP 48" AND CONTROLLED BY OTHERS AND INSTALLED BY THE ELECTRICAL CONTRACTOR.
- 21) ALL TELEPHONE CABLE SHALL BE CAT 5 CABLE.
- 22) EMERGENCY EXITED SWITCH FOR DISHWASHER.
- 23) ALL SWITCHES, RECEPTACLES AND LUNcheon BOX FACE PLATES SHALL BE EXTENDED TO FACE OF MILLWORK.
- 24) ALL GUESTROOM ENTRY SWITCHES AND BATHROOM SWITCHES SHALL HAVE LIFE-SWITCH BACKLIT FLUORESCENT UNIVERSAL SERIES CLEAR SWITCH PLATE -- MAINTAIN 2" DISTANCE FROM ALL OTHER DEVICES.
- 25) BLACK OUT SHADE -- OPENING DEVICE SWITCH IN ACCESSIBLE ROOMS.
- 26) ALL TYPE "D" RECEPTACLES IN GUEST ROOM BATHROOMS SHALL BE MOUNTED UP 82" TO THE TOP OF THE FURNITURE.
- 27) PROVIDE 3/4" CONDUIT CHASE ABOVE CEILING AT ALL GUESTROOM CEILING INTO CORRIDORS FOR TV AND DATA CABLE ACCESS INTO GUESTROOMS.
- 28) STAGGER ALL DEVICES A MINIMUM OF 24" AS REQUIRED BY ALL THE CODES -- VERIFY WITH LOCAL FIRE MARSHALLS AND ELECTRICAL INSPECTORS.

