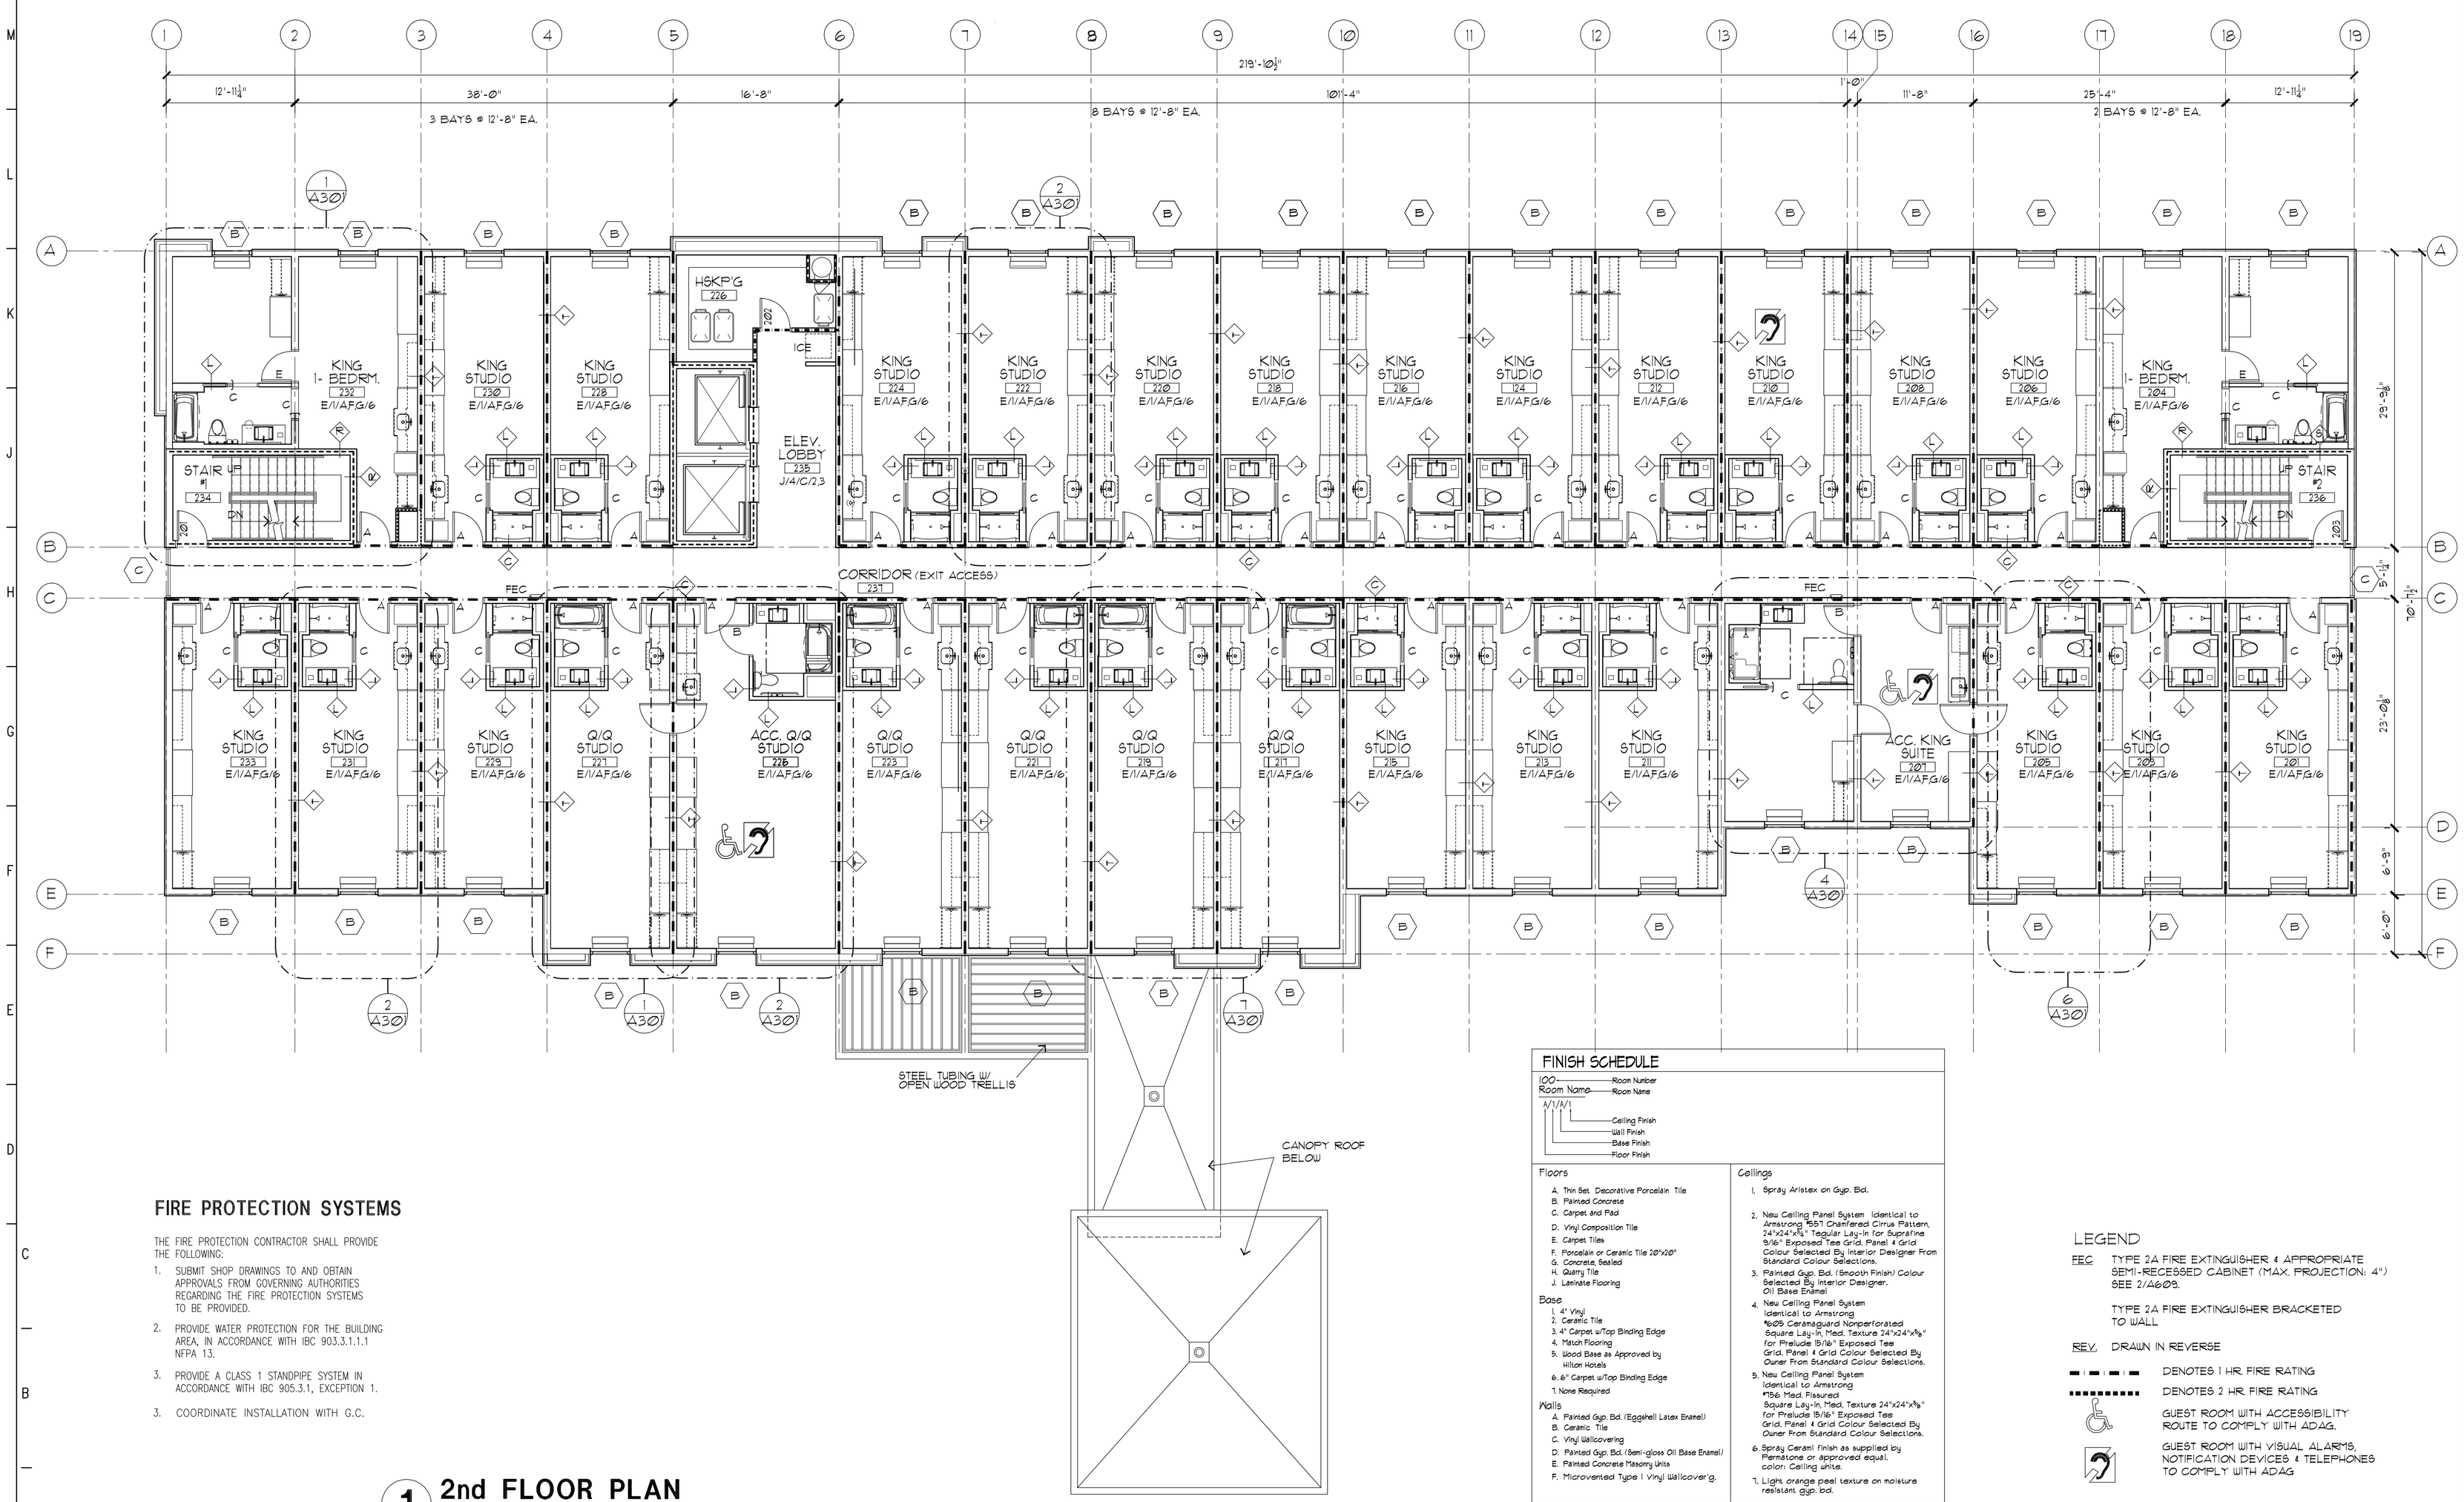

FIRE PROTECTION SYSTEMS

THE FIRE PROTECTION CONTRACTOR SHALL PROVIDE THE FOLLOWING:

1. SUBMIT SHOP DRAWINGS TO AND OBTAIN APPROVALS FROM GOVERNING AUTHORITIES REGARDING THE FIRE PROTECTION SYSTEMS TO BE PROVIDED.
2. PROVIDE WATER PROTECTION FOR THE BUILDING AREA, IN ACCORDANCE WITH IBC 903.3.1.1.1 NFPA 13.
3. PROVIDE A CLASS 1 STANDPIPE SYSTEM IN ACCORDANCE WITH IBC 905.3.1, EXCEPTION 1.
3. COORDINATE INSTALLATION WITH G.C.

1 2nd FLOOR PLAN

1/8"=1'-0"

AX-X-X

FINISH SCHEDULE

100 — Room Number
Room Name — Room Name
A/1/A/1
Ceiling Finish
Wall Finish
Base Finish
Floor Finish

Floors

A. Thin Set. Decorative Porcelain Tile
B. Painted Concrete
C. Carpet and Pad
D. Vinyl Composition Tile
E. Carpet Tiles
F. Porcelain or Ceramic Tile 20"x20"
G. Concrete, Sealed
H. Quarry Tile
J. Laminate Flooring

Base

1. 4" Vinyl
2. Ceramic Tile
3. 4" Carpet w/Top Binding Edge
4. Match Flooring
5. Wood Base as Approved by Hilton Hotels
6. 6" Carpet w/Top Binding Edge
7. None Required

Walls

A. Painted Gyp. Bd. (Eggshell Latex Enamel)
B. Ceramic Tile
C. Vinyl Wallcovering
D. Painted Gyp. Bd. (Semi-gloss Oil Base Enamel)
E. Painted Concrete *Masonry Units
F. Microvented Type I Vinyl Wallcover'g.

Ceilings

1. Spray Aristex on Gyp. Bd.
2. New Ceiling Panel System Identical to Armstrong *557 Chamfered Cirrus Pattern, 24"x24"x¾" Tegular Lay-in for Suprafine 9/16" Exposed Tee Grid. Panel & Grid Colour Selected By Interior Designer From Standard Colour Selections.
3. Painted Gyp. Bd. (Smooth Finish) Colour Selected By Interior Designer. Oil Base Enamel
4. New Ceiling Panel System Identical to Armstrong *6409 Ceramaguard Nonperforated Square Lay-in, Mad. Texture 24"x24"x⅝" for Prelude 15/16" Exposed Tee Grid. Panel & Grid Colour Selected By Owner From Standard Colour Selections.
5. New Ceiling Panel System Identical to Armstrong *1156 Mad. Fissured Square Lay-in, Mad. Texture 24"x24"x⅝" for Prelude 15/16" Exposed Tee Grid. Panel & Grid Colour Selected By Owner From Standard Colour Selections.
6. Spray Cerami Finish as supplied by Pierratone or approved equal. color: Ceiling white.
7. Light orange peel texture on moisture resistant gyp. bd.

LEGEND

FEC — TYPE 2A FIRE EXTINGUISHER & APPROPRIATE SEMI-RECESSED CABINET (MAX. PROJECTION: 4") SEE 2/A609.

TYPE 2A FIRE EXTINGUISHER BRACKETED TO WALL

REV. — DRAWN IN REVERSE

DENOTES 1 HR. FIRE RATING

DENOTES 2 HR. FIRE RATING

GUEST ROOM WITH ACCESSIBILITY ROUTE TO COMPLY WITH ADAG.

GUEST ROOM WITH VISUAL ALARMS, NOTIFICATION DEVICES & TELEPHONES TO COMPLY WITH ADAG

REISSUED:OCT17,2014

Richard Molenaar
ARCHITECT

RICHARD MOLENAAR
REGISTERED ARCHITECT
STATE OF LOUISIANA
Sept -14

PROJECT NAME:
HOME2 SUITES BY HILTON

W Mane Street — West Monroe, Lousiana

SHEET TITLE:

PROJECT NO. 13010
LATEST REVISION:
DRAWN BY: cj
CHECKED BY:
SHEET NUMBER: A104
DATE: Sept 5,2014