


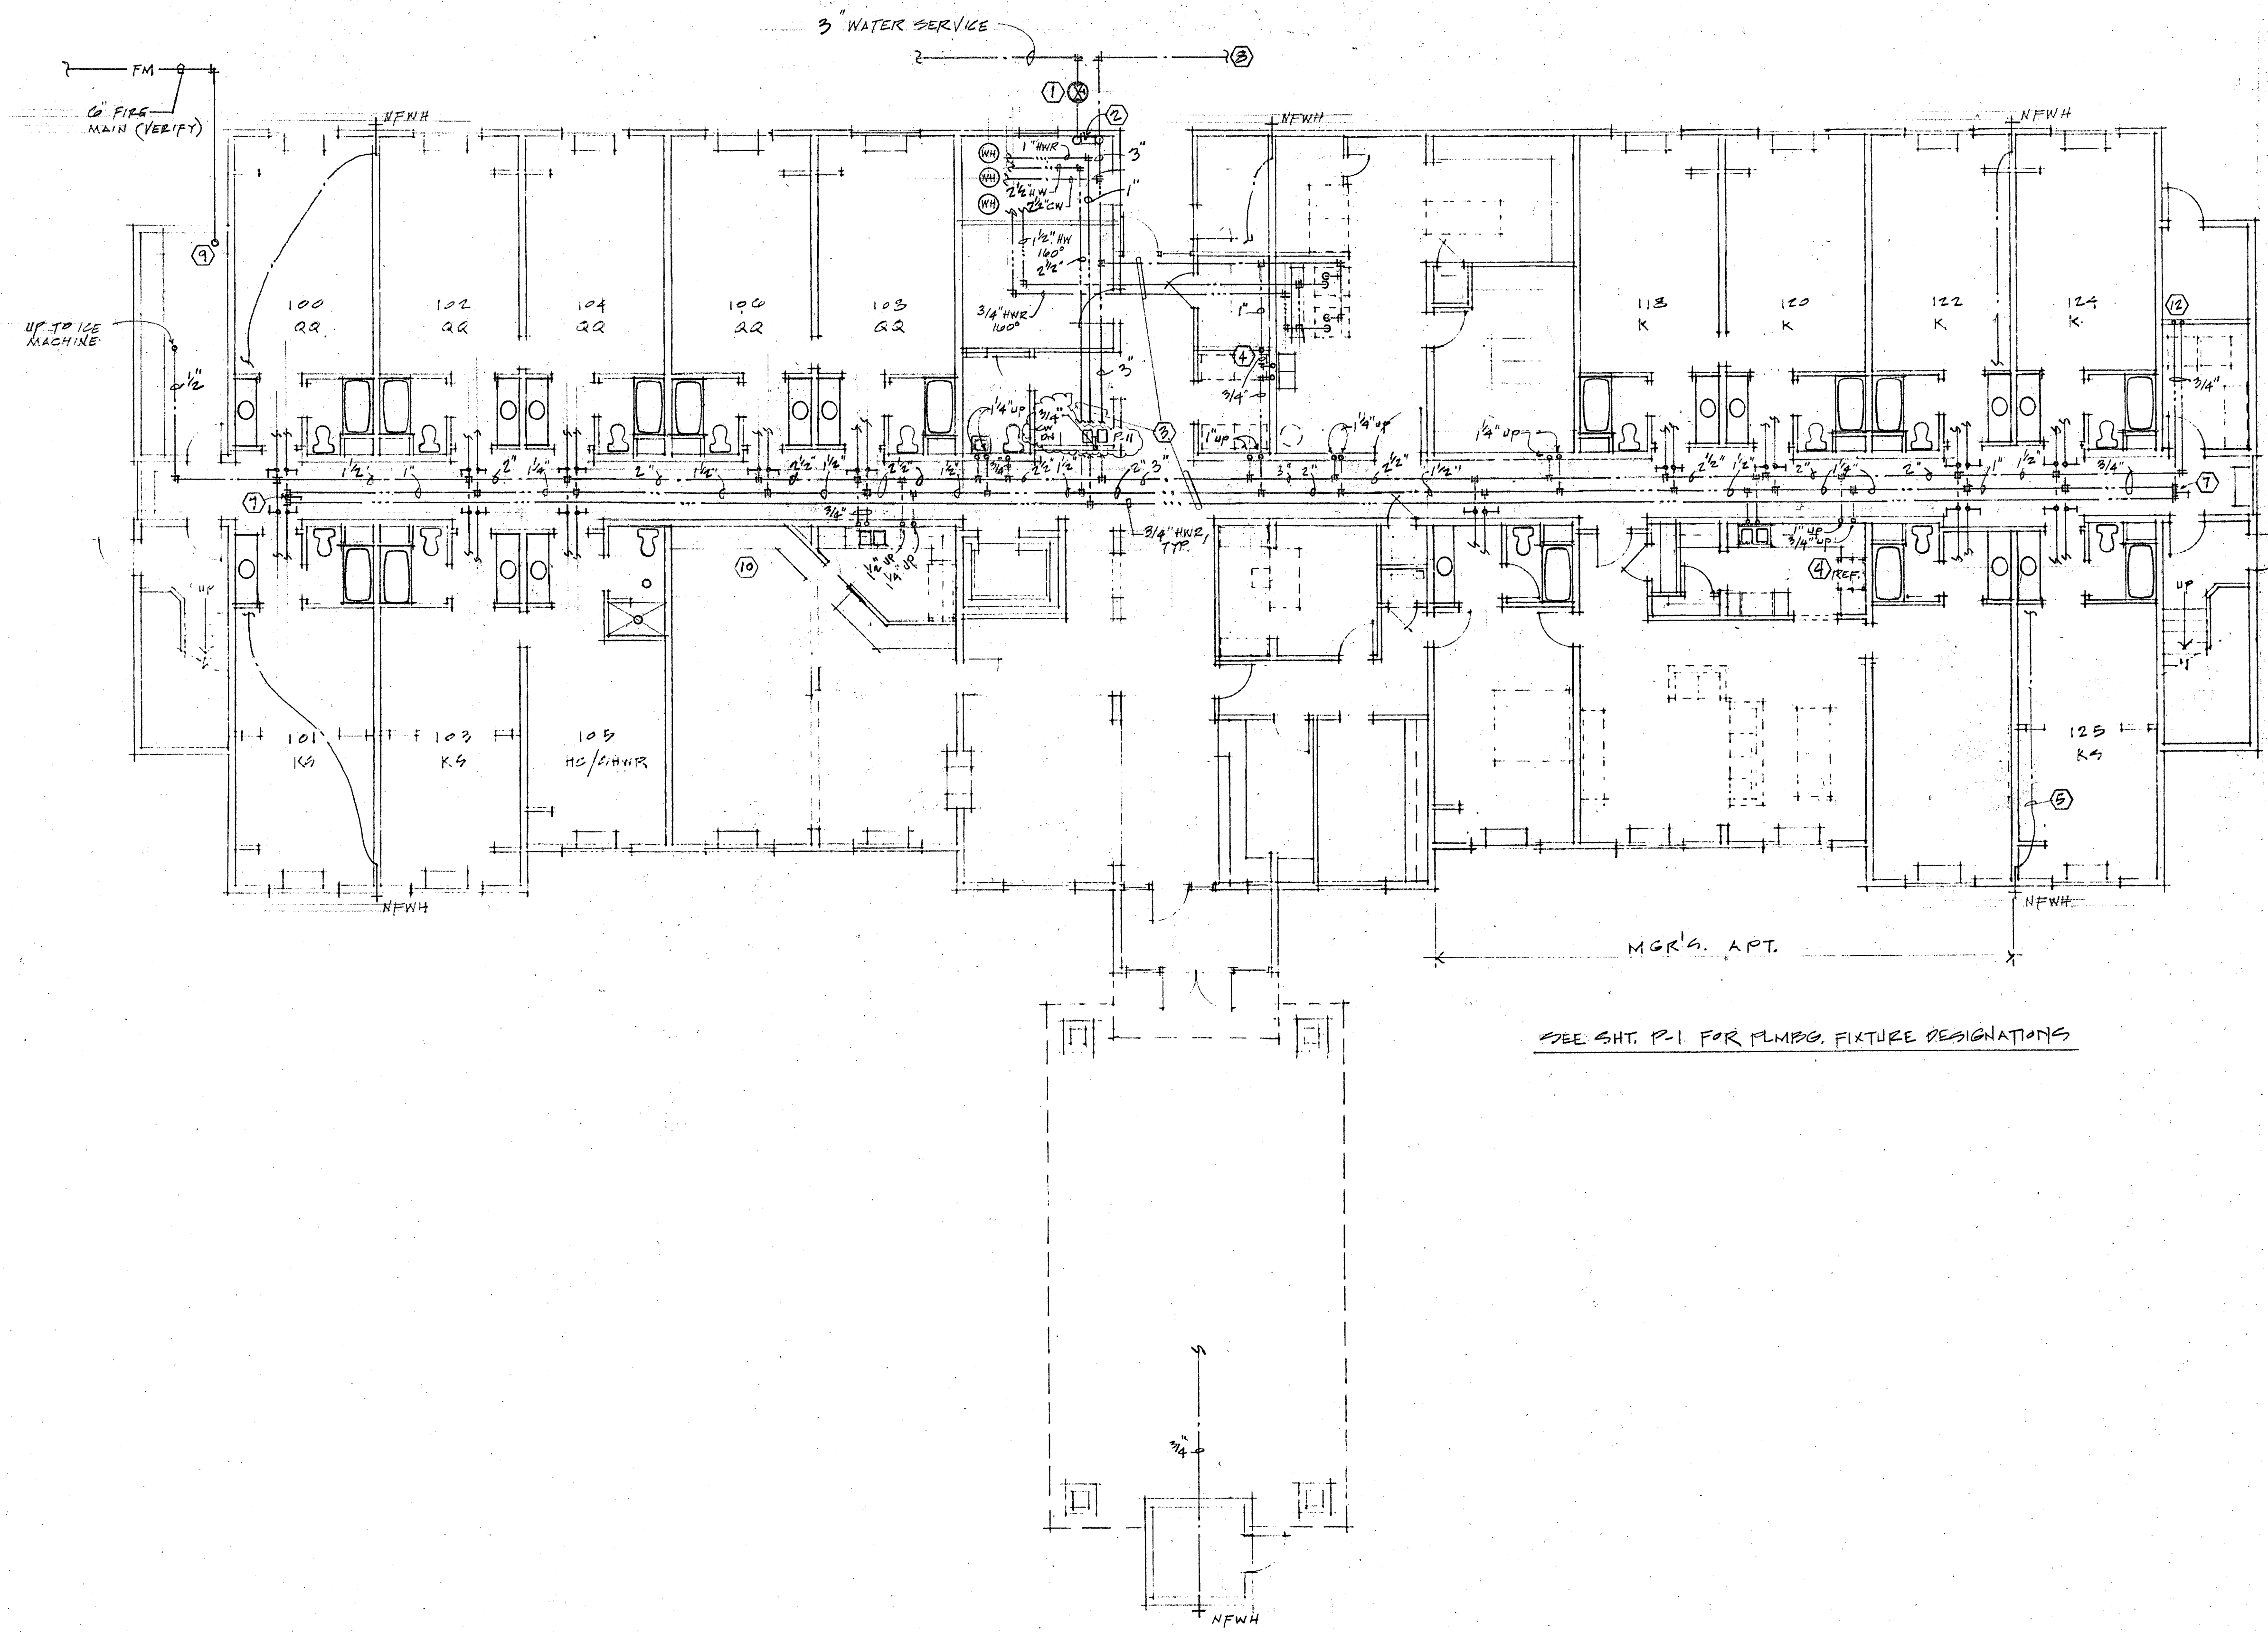

KEYNOTES (Applicable to Sheets P-2,3,4)

- 1 Valve in box.
- 2 Backflow preventer and PRV braced on wall. Install per local regulations.
- 3 Water mains under 2nd floor assembly, above hung ceiling in public areas, typ.
- 4 Provide 1/2" CW to wall box with valve for ice machine (P-9).
- 5 1" copper 3/4" under floor from valve under lavatory, typ. for NFWH. No joints under floor.
- 6 Provide 1/4" copper tube in box from sink for refrigerator ice maker.
- 7 Balance valve.
- 8 1" CW for pool contractor use (verify).
- 9 Fire main stub-up and cap for extension by Fire Protection contractor.
- 10 Confer with Owner to provide water as may be required at buffet, juice machine (NFC) will require 1/2" S.W.
- 11 Provide 1/2" HW connection to dish washer from sink (P-12).
- 12 Provide wall box & coin-op washer w/ 1/2" CW & HW valves.

FIRE PROTECTION SYSTEM

1. PROVIDE AN AUTOMATIC SPRINKLER SYSTEM (NFPA 13) FOR THE ENTIRE ENCLOSED BUILDING. STANDPIPE SYSTEM IS NOT REQ'D. BY CODE, BUT CONFIRM W/ CITY. THE FIRE PROTECTION CONTRACTOR SHALL SUBMIT SHOP DRAWINGS TO AND OBTAIN APPROVALS FROM GOVERNING AUTHORITIES REGARDING THE FIRE PROTECTION SYSTEM TO BE PROVIDED WITHIN 2 WEEKS OF EXECUTION OF OWNER-CONTRACTOR AGREEMENT. COORDINATE INSTALLATION WITH G.C.

RICHARD MOLENAAR
ARCHITECT

DAYS INN

PEARL, MS

GROUND FLOOR PLAN
WATER
1/3" = 1'-0"

97000
3-25-99
P-2