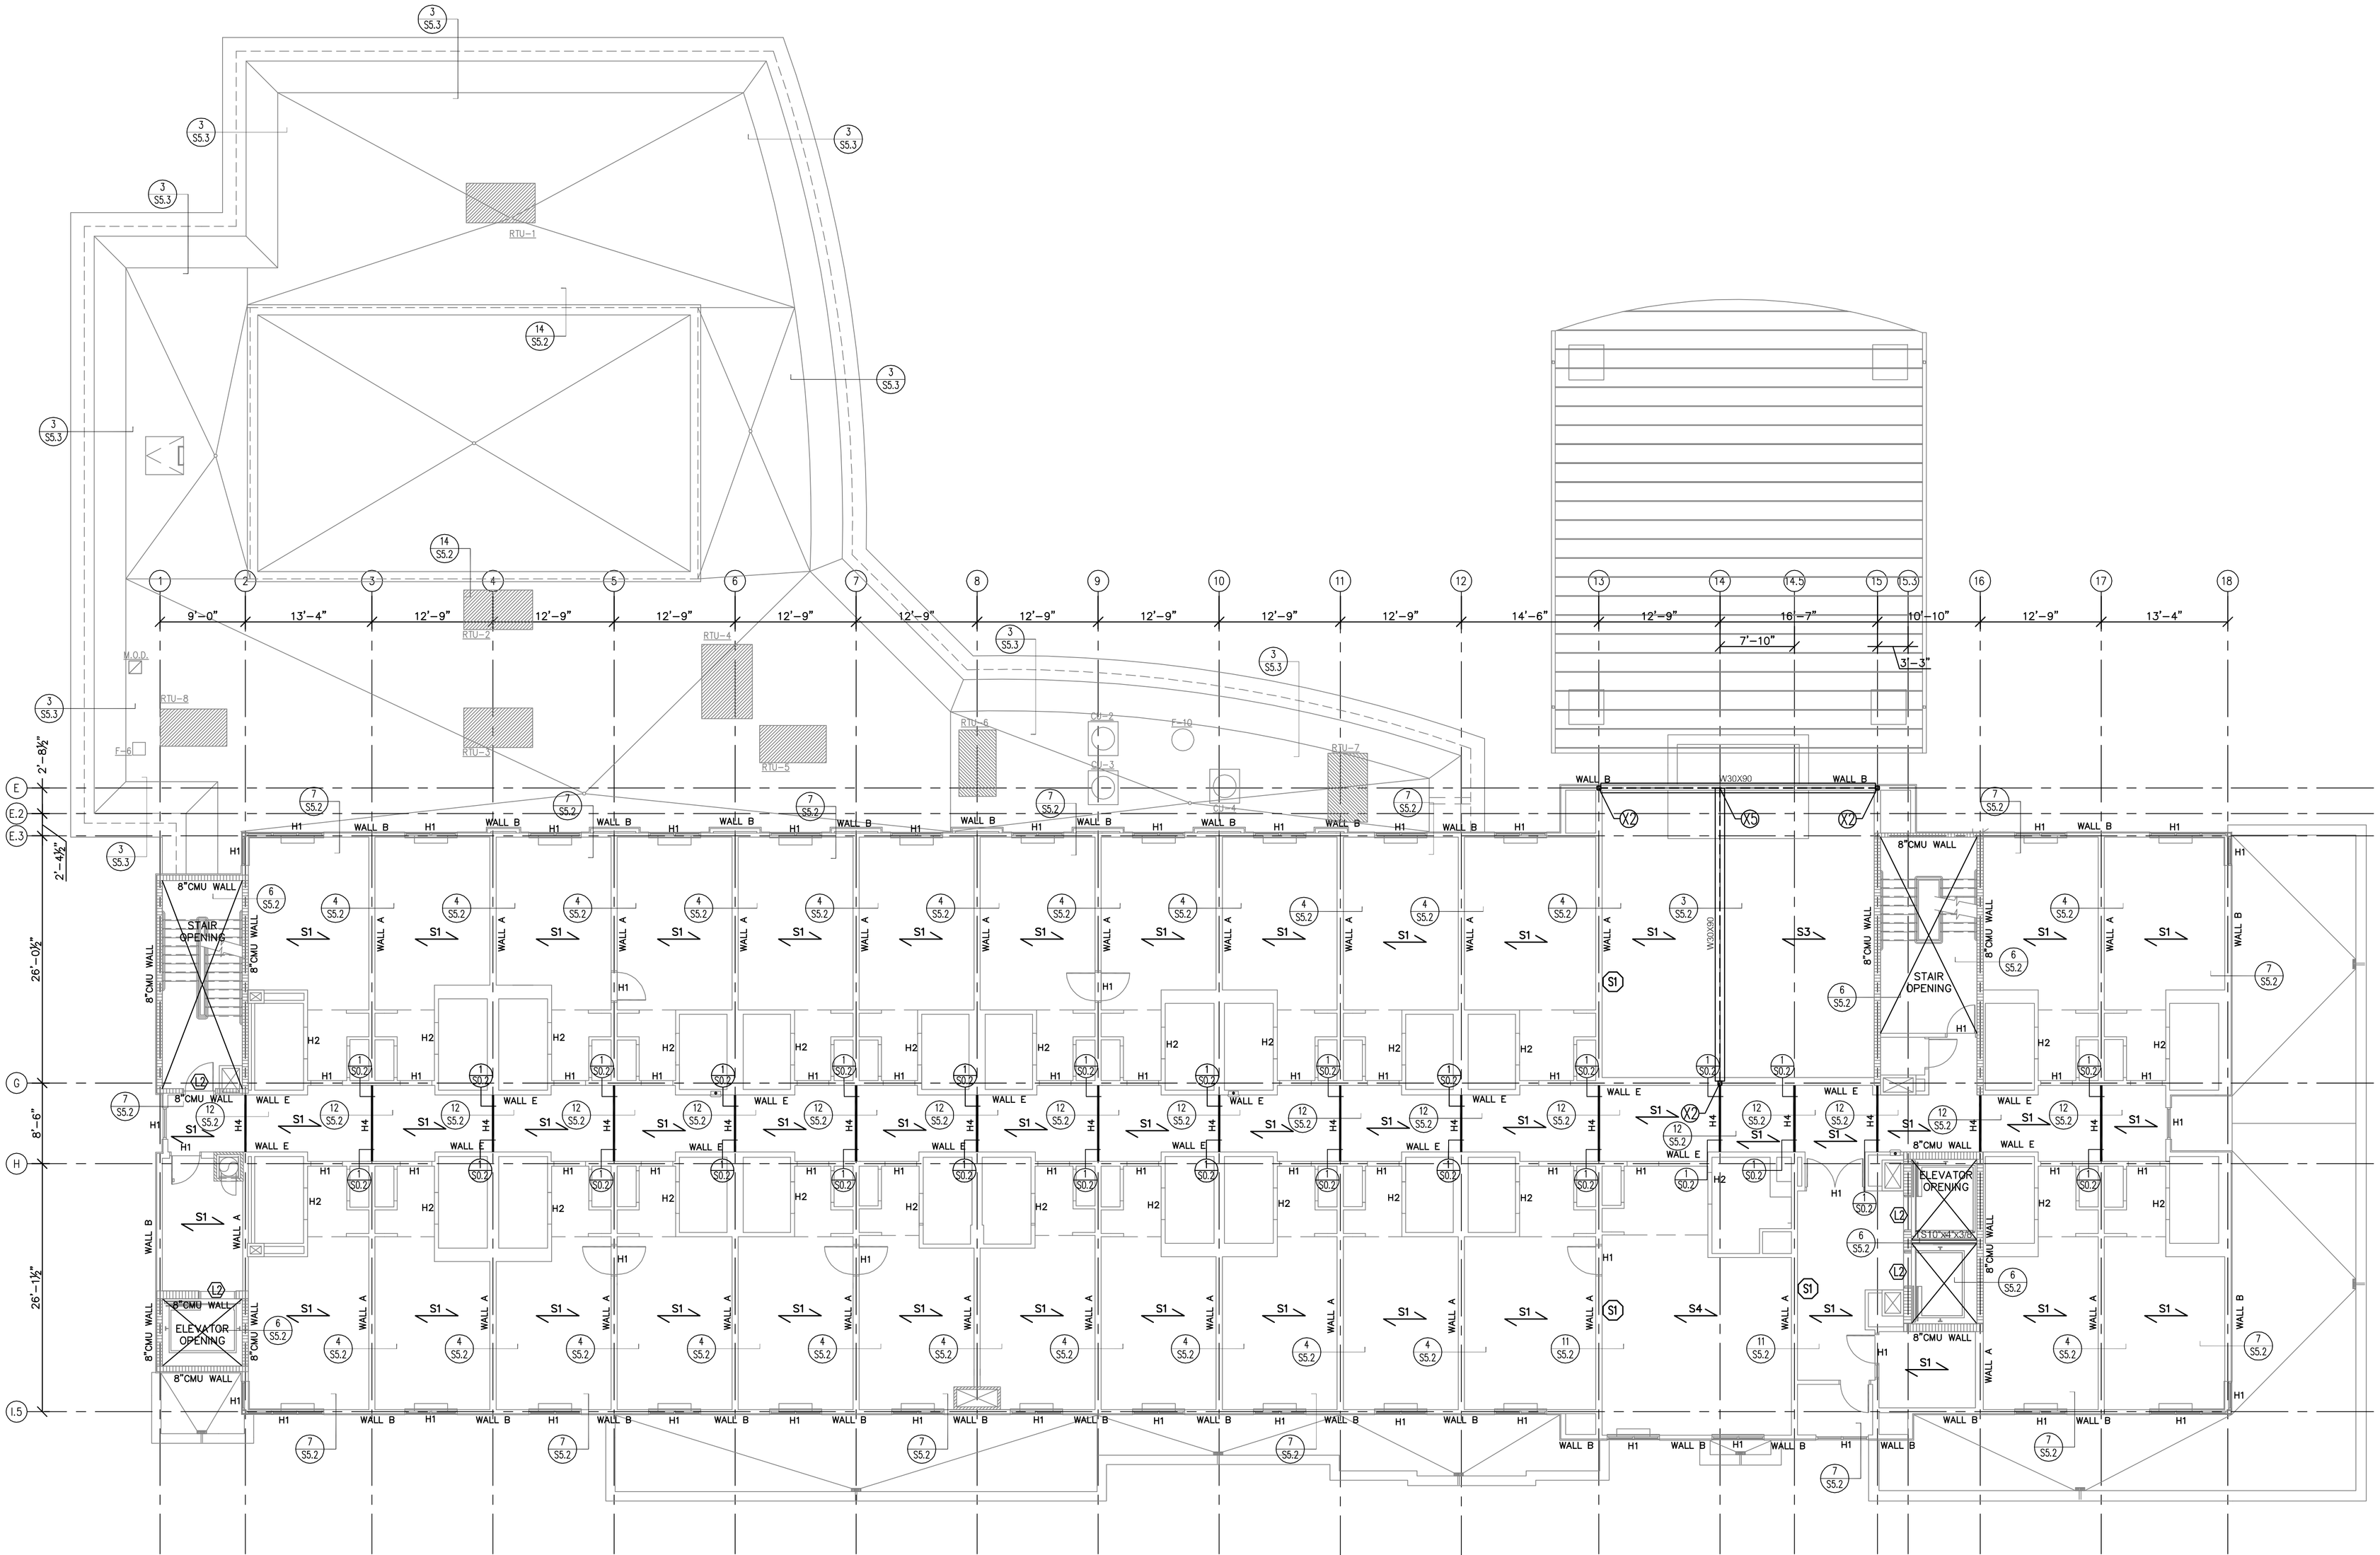

3rd FLOOR FRAMING PLAN & WALL/HEADER FOR 2nd FLOOR PLAN

SCALE: 1/8"=1'-0"

COLUMN LEGEND	STEEL CONNECT LEGEND								WALL TYPE SCHEDULE	
C1 HSS 6"X6"X1/2" COLUMN	X1	A/S5.3	X3	C/S5.3	X5	E/S5.3	X7	G/S5.3	WALL A	600S162-97-50 @ 16" O.C.
C2 HSS 5"X5"X5/16" COLUMN	X2	B/S5.3	X4	D/S5.3	X6	F/S5.3	X8	H/S5.3	WALL B	600S162-68-50 @ 16" O.C.
C3 HSS 7"X7"X1/2" COLUMN									WALL C	600S162-54-50 @ 16" O.C.
									WALL D	600S162-43-33 @ 16" O.C.
									WALL E	600S162-33-33 @ 16" O.C.

NOTE: THE ENTIRE EXTERIOR WALL IS TO BE SHEATHED w/7/16" OSB w/ FASTENER SPACING @ 6" ON EDGES AND 12" MAX INTERMEDIATELY

ALL TRACKS = SAME GAGE AS STUD w/1 ½" FLANGE

METAL STUD DESIGN
600S162-43-33
MEMBER DEPTH — S= STUD — FLANGE WIDTH — KSI OF STEEL — MATERIAL THICKNESS

ALL GWB FOR WALLS A–E TO BE APPLIED PERPENDICULAR TO FRAMING w/STRAP BLOCKING BEHIND HORIZONTAL JOINTS AND w/SCREW FASTENERS @ 7" OC. AT EDGES AND IN THE FIELD.

HEADER SCHEDULE		METAL DECK SCHEDULE	
H1	(2)-600S162-54-50	S1	2VL16 (T=3") TT=2"
H2	(2)-600S162-43-33	S2	3N18 (NO CONCRETE)
H3	(2)-600S162-33-33	S3	2VL16 (T=3") TT=2"
H4	(2)-1000S162-68-50 UNPUNCHED	S4	2VL16 (T=4") TT=2"

SEE SHEET S0.3 FOR CONCRETE HEADERS

ALL METAL DECK TO BE FASTENED w/5/8" PUDDLE WELDS.

2VL16 PATTERN = 36/4 w/SIDELAP FASTENERS @ 12" O.C.

3N18 PATTERN = 24/4 w/SIDELAP FASTENERS @ 12" O.C.

(S1) SHEAR WALL FROM FLOOR TO BOTTOM OF FLOOR ABOVE w/7/16" OSB PANELS w/SCREW FASTENERS @ 2" SPACING ON EDGES AND 10" AT INTERMEDIATE SUPPORTS AND w/FULLY BLOCKED GWB OPPOSITE SIDE w/SCREW SPACING AT 7" ON EDGES AND IN FIELD. 7/16" OSB REQUIRED BOTH SIDES OF EXTERIOR WALLS. ANCHORS = ¾"Ø A325 GROUTED BOLTS @ 32" O.C. w/12" MIN EMBED.

GENERAL NOTE:
1. SEE SHEET S0.2 FOR FRAME OPENING.
2. DOUBLE BAR JOIST AT ALL MECH. RTU UNITS.

LLW ARCHITECTS
803 S. MOUNT MORIAH
SUITE 100B
MEMPHIS, TN 38117
(901) 683-7175 p.
(901) 683-2385 f.
llw@llwarchitects.com

NO.	ISSUED	DATE
1	ISSUED	10/26/07

NO.	REVISIONS	DATE

COPYRIGHT BY LLW ARCHITECTS, INC
WARNING: UNAUTHORIZED COPYING VIOLATES U.S. COPYRIGHT LAWS AND WILL SUBJECT THE VIOLATOR TO LEGAL PROSECUTION.

CONSULTANTS
STRUCTURAL:
SK INTERNATIONAL, INC.
130 SOUTH MAIN STREET
HUNTSVILLE, AL 35811
(256) 852-3098

MECHANICAL:
CRABTREE ENGINEERING
726 S. MT. MORIAH
MEMPHIS, TN 38117
(901) 767-9898

PLUMBING:
CRABTREE ENGINEERING
726 S. MT. MORIAH
MEMPHIS, TN 38117
(901) 767-9898

ELECTRICAL:
CHS ENGINEERING
726 S. MT. MORIAH
MEMPHIS, TN 38117
(901) 767-2557

SEAL

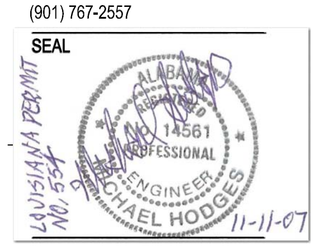

Holiday Inn MILLENNIUM
BOSSIER CITY, LOUISIANA

SHEET NAME
3rd FLOOR FRAMING PLAN & WALL/HEADER FOR 2nd FLOOR PLAN

DATE 10/26/07
DRAWN BY RDR
CHECKED BY MCP
FILE NAME 1507-STPL
SCALE AS NOTED
PROJECT NO. 1507
DRAWING

S2.2